


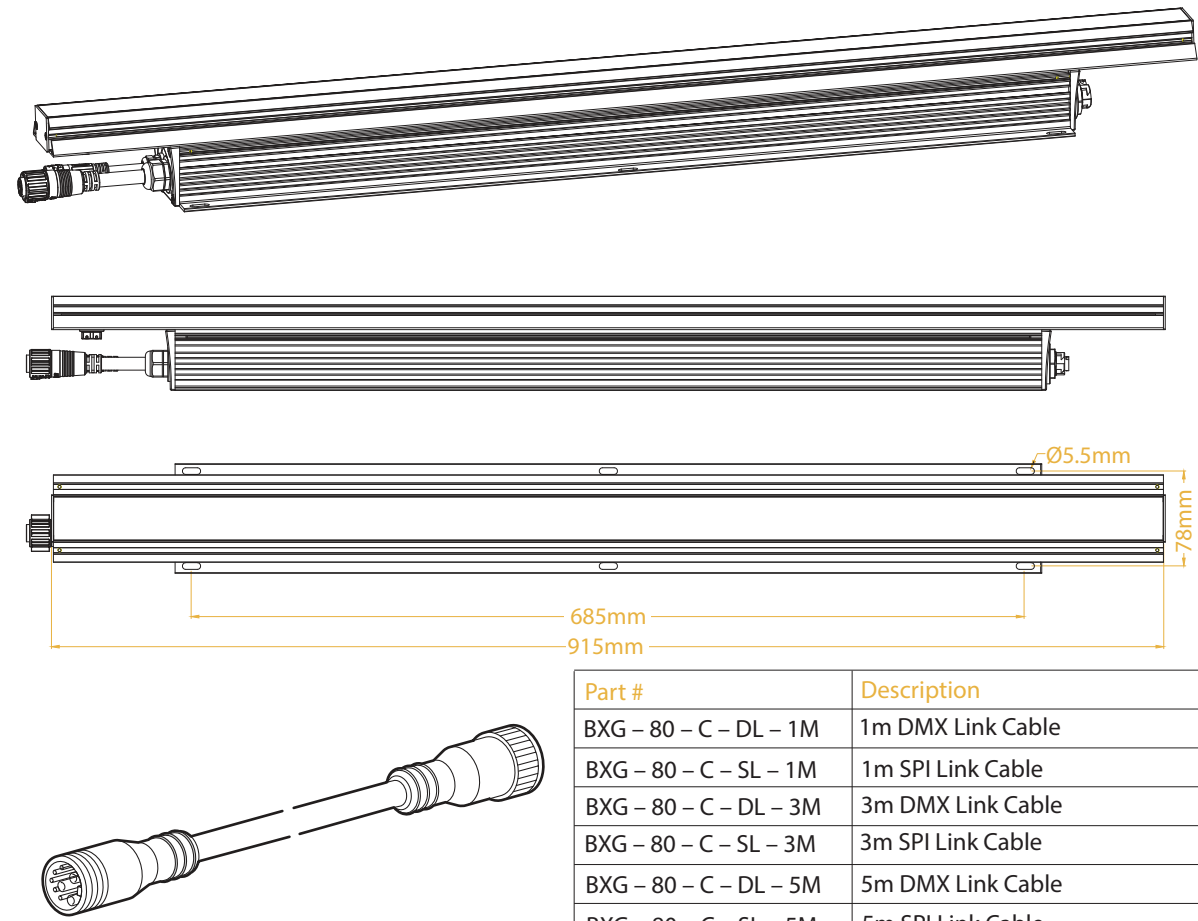

Part #	Description
BXG – 80 – C – DL – 1M	1m DMX Link Cable
BXG – 80 – C – SL – 1M	1m SPI Link Cable
BXG – 80 – C – DL – 3M	3m DMX Link Cable
BXG – 80 – C – SL – 3M	3m SPI Link Cable
BXG – 80 – C – DL – 5M	5m DMX Link Cable
BXG – 80 – C – SL – 5M	5m SPI Link Cable
BXG – 80 – C – DL – XX	Custom Length DMX Link Cable
BXG – 80 – C – SL – XX	Custom Length SPI Link Cable

Linking cables featuring IP66 plug-and-play connectors at each end. Custom lengths are available.

- D** – DMX 6 Pin
- S** – SPI 3 Pin IP66
- SR** – SPI Redundancy
 - Power 3 Pin IP66
 - Data 3 Pin IP66

*Note: increasing feeder cable lengths impacts system designs, contact local distributors for technical system design constraints.