


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 22.44 lm/W			
MODEL	3014	I _{max} (cd)	32.57	S/MH(C0/180)	1.23
NOMINAL POWER(W)	4.5	LOR(%)	118.1	S/MH(C90/270)	1.19
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	94.471	η UP, DN(C0-180)	1.1, 53.6
NOMINAL FLUX(lm)	80	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.8, 62.5
LAMPS INSIDE	1	η up(%)	1.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	116.2	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

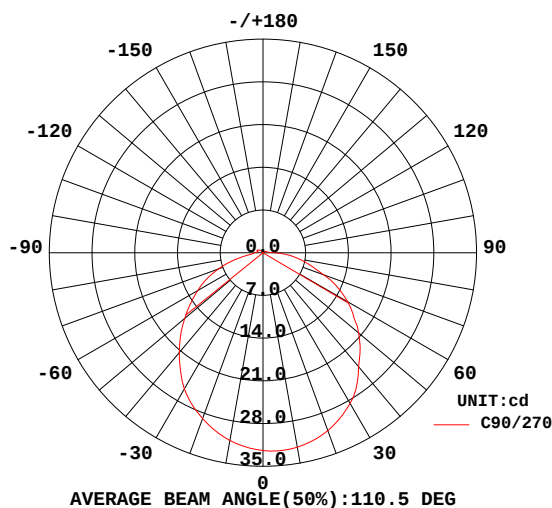

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

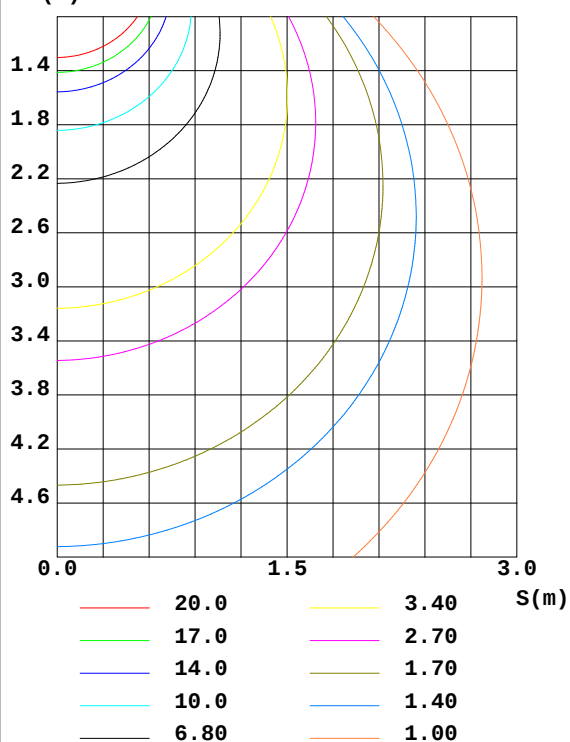

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	31.66	31.31	31.23	31.46	31.91	32.29	32.35	32.11	0- 10	3.064	3.064	3.24, 3.83
20	29.71	29.11	28.93	29.36	30.21	30.90	31.03	30.57	10- 20	8.754	11.82	12.5, 14.8
30	26.71	25.95	25.77	26.32	27.42	28.35	28.53	27.89	20- 30	13.21	25.03	26.5, 31.3
40	22.86	21.83	21.33	22.31	23.77	24.86	24.37	24.29	30- 40	15.82	40.85	43.2, 51.1
50	18.42	17.18	16.77	17.76	19.46	20.63	20.46	19.98	40- 50	16.28	57.13	60.5, 71.4
60	13.59	12.30	12.34	12.92	14.72	15.75	15.99	15.25	50- 60	14.73	71.87	76.1, 89.8
70	8.585	7.463	7.823	8.116	9.712	10.68	10.59	10.38	60- 70	11.56	83.42	88.3, 104
80	3.429	2.498	2.859	3.167	4.511	6.007	6.097	5.446	70- 80	7.086	90.51	95.8, 113
90	0	0.5697	1.420	0.6258	0	1.137	1.920	0.7655	80- 90	2.436	92.95	98.4, 116
100	0	0.3717	0.8651	0.4002	0	0.3474	0.8003	0.3372	90-100	0.5414	93.49	99, 117
110	0	0.3504	1.033	0.3104	0	0.2614	0.5026	0.2416	100-110	0.3533	93.84	99.3, 117
120	0	0.3007	0.8960	0.2450	0	0.1721	0.4777	0.2086	110-120	0.3015	94.14	99.7, 118
130	0	0.2297	0.6448	0.1147	0	0.0845	0.3690	0.1443	120-130	0.1962	94.34	99.9, 118
140	0	0.0457	0.3684	0.0001	0	0.0225	0.2916	0.0956	130-140	0.1085	94.45	100, 118
150	0	0	0	0	0	0	0.1025	0.0109	140-150	0.0219	94.47	100, 118
160	0	0	0	0	0	0	0	0	150-160	0.0021	94.47	100, 118
170	0	0	0	0	0	0	0	0	160-170	0	94.47	100, 118
180	0	0	0	0	0	0	0	0	170-180	0	94.47	100, 118
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M	TYPE:	WEIGHT: 0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.: 10*1000mm	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.40	1.40	1.40	1.37	1.37	1.37	1.30	1.30	1.30	1.24	1.24	1.24	1.19	1.19	1.19	1.16
1.0	1.22	1.16	1.12	1.19	1.14	1.10	1.13	1.09	1.06	1.08	1.05	1.02	1.04	1.01	.99	.96
2.0	1.06	.97	.90	1.03	.96	.89	.99	.92	.87	.95	.89	.85	.91	.86	.82	.80
3.0	.93	.83	.75	.91	.82	.74	.87	.79	.73	.83	.77	.71	.80	.74	.70	.67
4.0	.82	.71	.63	.80	.70	.63	.77	.69	.62	.74	.67	.61	.71	.65	.60	.57
5.0	.73	.62	.55	.72	.62	.54	.69	.60	.53	.66	.59	.53	.64	.57	.52	.49
6.0	.66	.55	.48	.65	.55	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.43
7.0	.60	.49	.42	.59	.49	.42	.57	.48	.41	.55	.47	.41	.53	.46	.40	.38
8.0	.54	.44	.37	.54	.44	.37	.52	.43	.37	.50	.42	.37	.49	.42	.36	.34
9.0	.50	.40	.34	.49	.40	.33	.48	.39	.33	.46	.38	.33	.45	.38	.33	.30
10.0	.46	.37	.30	.45	.36	.30	.44	.36	.30	.43	.35	.30	.42	.35	.30	.28

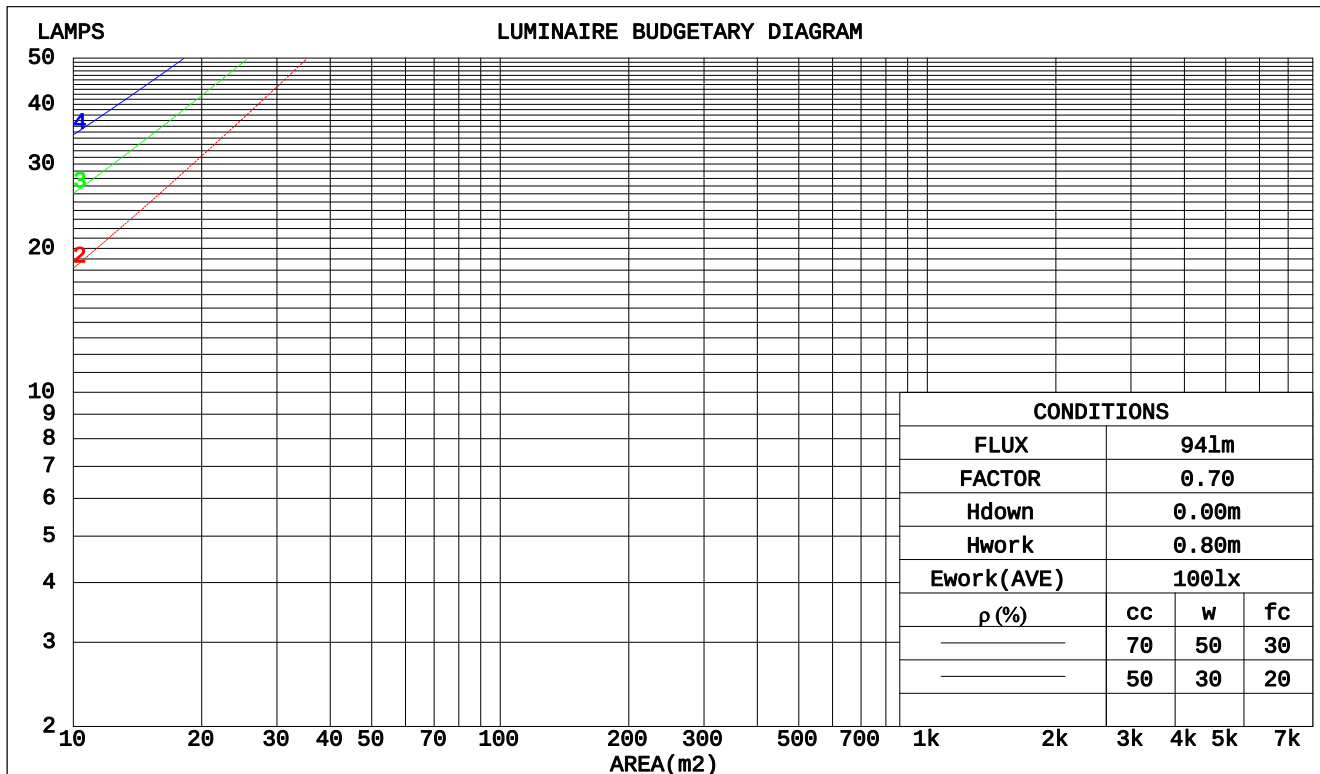

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: shan
Test Date: 2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity: 45.0%
Test Distance: 6.950m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

ρ _{CC}	80%			70%			50%			30%			10%			0	
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.377	.215	.068	.368	.210	.067	.351	.202	.064	.336	.194	.062	.322	.187	.060		
2.0	.351	.192	.059	.343	.189	.058	.328	.182	.057	.314	.176	.055	.302	.171	.054		
3.0	.323	.172	.051	.316	.169	.051	.302	.164	.050	.290	.159	.049	.279	.154	.048		
4.0	.297	.154	.045	.291	.152	.045	.279	.148	.044	.268	.144	.043	.258	.140	.043		
5.0	.274	.139	.040	.268	.138	.040	.258	.134	.039	.248	.131	.039	.239	.128	.038		
6.0	.253	.127	.036	.248	.125	.036	.239	.123	.036	.230	.120	.035	.222	.117	.035		
7.0	.236	.116	.033	.231	.115	.033	.223	.113	.032	.215	.110	.032	.208	.108	.032		
8.0	.220	.107	.030	.216	.106	.030	.208	.104	.030	.201	.102	.029	.195	.100	.029		
9.0	.206	.100	.028	.202	.099	.028	.195	.097	.027	.189	.095	.027	.183	.093	.027		
10.0	.193	.093	.026	.190	.092	.026	.184	.090	.025	.178	.088	.025	.173	.087	.025		

ρ _{CC}	80%			70%			50%			30%			10%			0	
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{fC}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.239	.239	.239	.205	.205	.205	.140	.140	.140	.080	.080	.080	.026	.026	.026		
1.0	.228	.199	.172	.195	.171	.148	.134	.117	.103	.077	.068	.060	.025	.022	.019		
2.0	.219	.170	.130	.188	.147	.112	.129	.102	.078	.074	.059	.046	.024	.019	.015		
3.0	.210	.150	.102	.180	.129	.088	.123	.090	.062	.071	.052	.037	.023	.017	.012		
4.0	.201	.134	.083	.172	.116	.072	.118	.081	.051	.069	.047	.030	.022	.015	.010		
5.0	.192	.122	.070	.165	.106	.061	.114	.074	.043	.066	.043	.026	.021	.014	.008		
6.0	.183	.112	.061	.158	.097	.053	.109	.068	.038	.063	.040	.022	.020	.013	.007		
7.0	.175	.104	.054	.151	.090	.047	.104	.063	.033	.060	.037	.020	.020	.012	.007		
8.0	.168	.097	.049	.144	.084	.043	.100	.059	.030	.058	.035	.018	.019	.011	.006		
9.0	.160	.091	.045	.138	.079	.039	.096	.056	.028	.056	.033	.017	.018	.011	.005		
10.0	.154	.086	.042	.132	.075	.036	.092	.053	.026	.054	.031	.015	.017	.010	.005		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

Uncorrected UGR Table

NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M						TYPE:			WEIGHT:0.126Kg/m		
DIM.: 10*10mm						SPEC.:			SERIAL No.:		
MFR.:						SUR.:10*1000mm			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	16.2	17.7	16.5	17.9	18.1	15.5	17.0	15.8	17.2	17.5
	3H	17.7	19.1	18.0	19.4	19.6	17.0	18.4	17.3	18.6	18.9
	4H	18.3	19.6	18.7	19.9	20.2	17.6	18.9	17.9	19.2	19.5
	6H	18.7	20.0	19.1	20.3	20.6	17.9	19.1	18.2	19.4	19.7
	8H	18.8	20.0	19.2	20.3	20.7	17.9	19.1	18.3	19.5	19.8
	12H	18.8	20.0	19.2	20.3	20.6	18.0	19.2	18.4	19.5	19.8
4H	2H	16.6	18.0	17.0	18.2	18.5	16.1	17.4	16.4	17.7	18.0
	3H	18.3	19.5	18.7	19.8	20.1	17.7	18.9	18.1	19.2	19.6
	4H	19.0	20.1	19.4	20.4	20.8	18.4	19.5	18.8	19.8	20.2
	6H	19.5	20.5	20.0	20.9	21.3	18.8	19.8	19.3	20.2	20.6
	8H	19.7	20.5	20.1	20.9	21.4	18.9	19.8	19.4	20.2	20.6
	12H	19.7	20.5	20.1	20.9	21.3	19.0	19.9	19.5	20.3	20.7
8H	4H	19.2	20.1	19.6	20.5	20.9	18.6	19.5	19.1	19.9	20.3
	6H	19.8	20.5	20.2	20.9	21.4	19.1	19.9	19.6	20.3	20.8
	8H	19.9	20.6	20.4	21.0	21.5	19.3	19.9	19.8	20.4	20.9
	12H	20.0	20.5	20.5	21.0	21.5	19.5	20.0	20.0	20.5	21.0
12H	4H	19.2	20.0	19.6	20.4	20.8	18.6	19.4	19.1	19.9	20.3
	6H	19.8	20.4	20.3	20.9	21.4	19.1	19.8	19.6	20.3	20.7
	8H	19.9	20.5	20.4	21.0	21.5	19.3	19.9	19.8	20.4	20.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.3					
2.0H	+ 0.3 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 80.00 lm Total Lamp Luminous Flux.(8log(F/F0) = -8.8)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) × RCR = 5									
k = 0.60	67	53	45	66	53	45	65	52	45	37
0.80	79	65	56	77	64	56	75	63	55	47
1.00	88	75	66	87	74	66	84	76	65	57
1.25	97	84	75	95	83	75	92	81	74	65
1.50	103	91	82	101	90	82	97	87	80	71
2.00	111	100	92	108	99	92	104	96	90	80
2.50	115	106	99	113	104	97	108	101	95	85
3.00	119	111	104	117	109	103	112	105	100	90
4.00	124	117	112	121	115	110	116	111	106	95
5.00	127	121	116	124	119	114	119	114	110	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M	TYPE:	WEIGHT: 0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.: 10*1000mm	PROTECTION ANGLE:

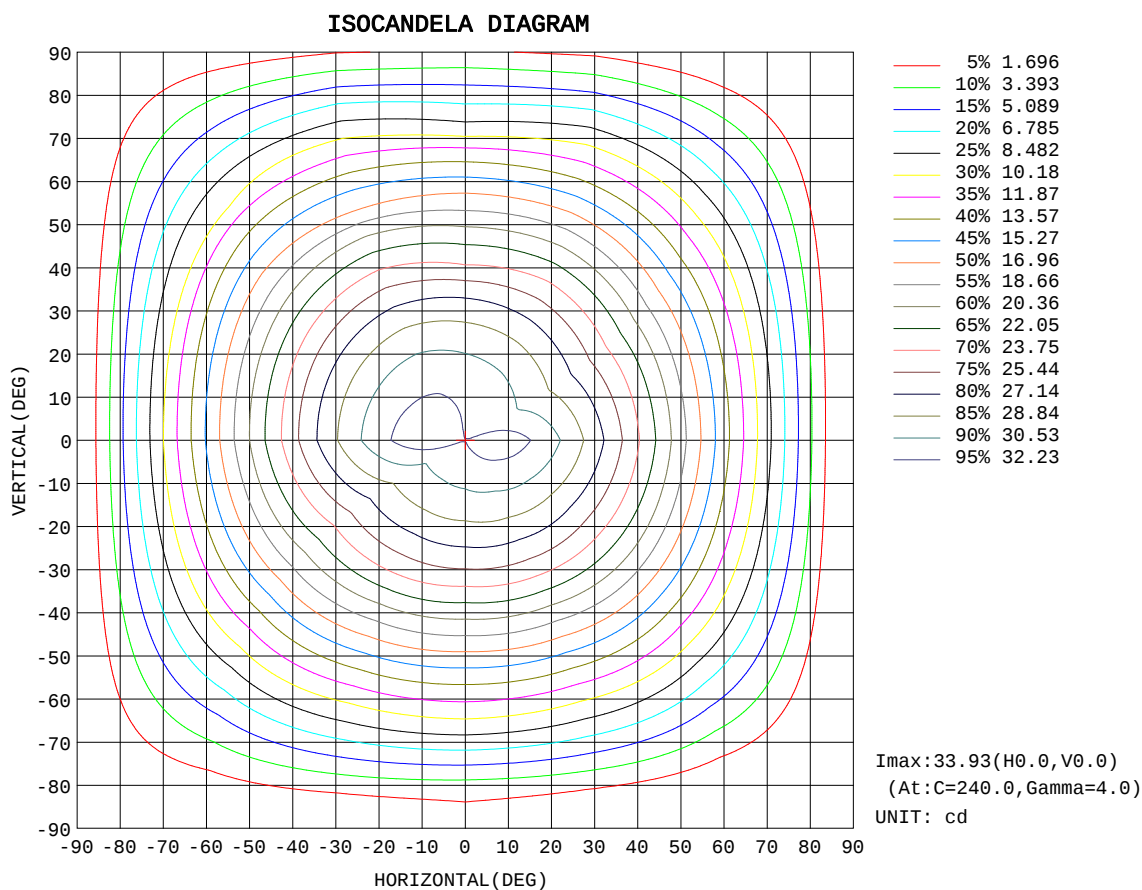


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: shan
Test Date: 2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity: 45.0%
Test Distance: 6.950m [K=1.0000]
Remarks:

AAI Figure

NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M	TYPE:	WEIGHT: 0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.: 10*1000mm	PROTECTION ANGLE:

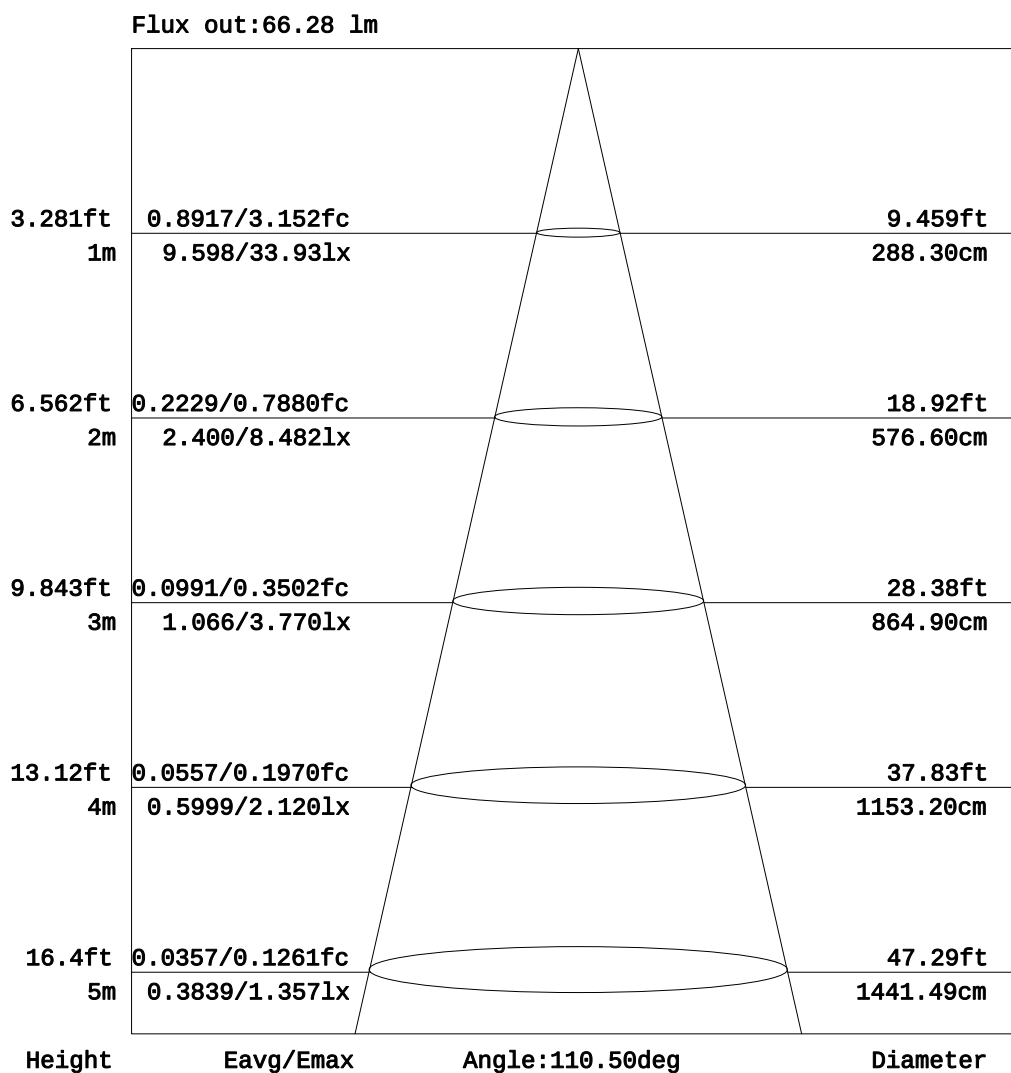


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: shan
Test Date: 2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V1.0.257
Humidity: 45.0%
Test Distance: 6.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

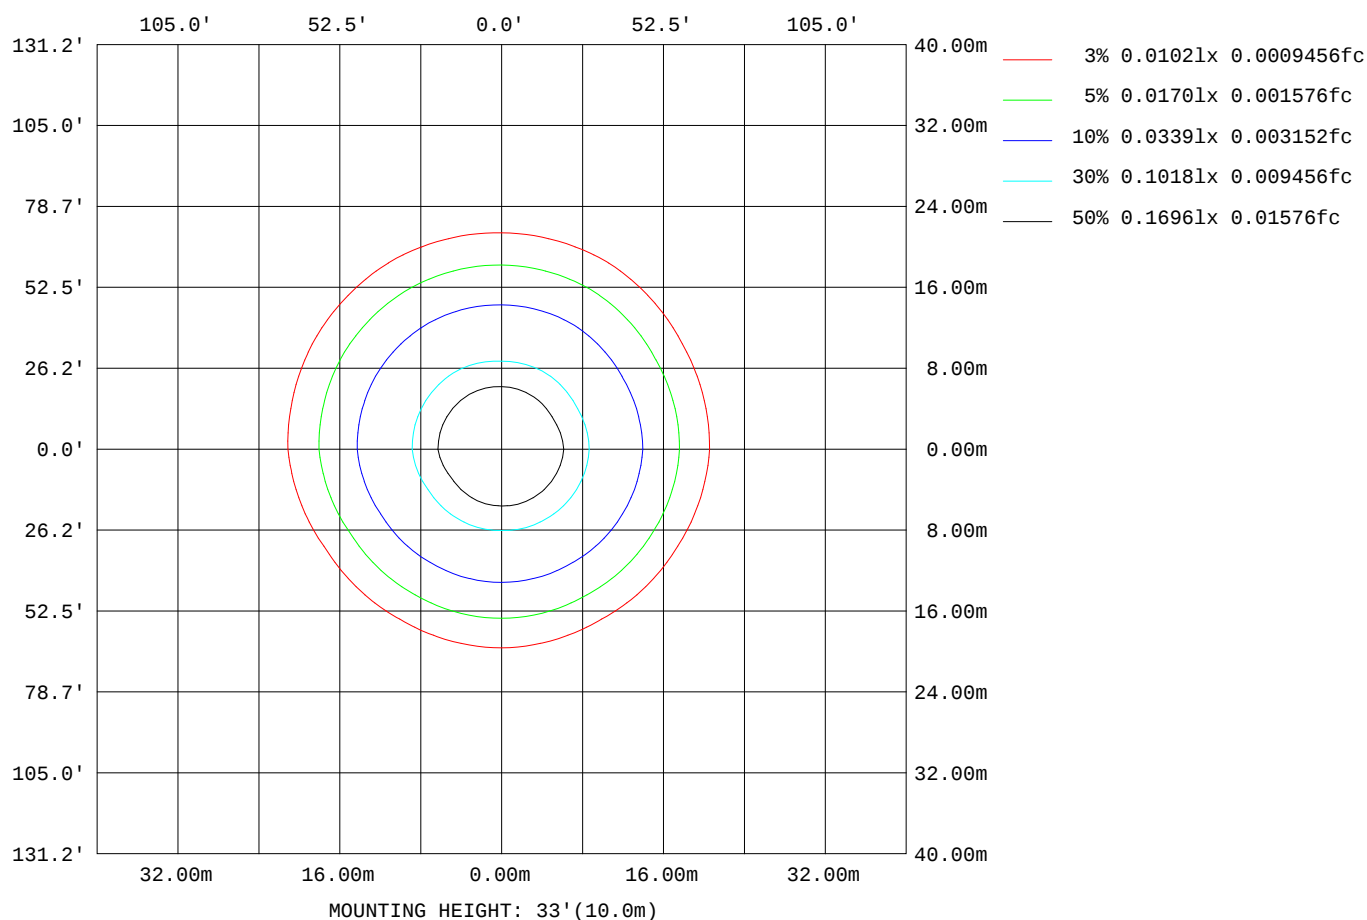

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

Average Luminance Table(CIBSE)

NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

Parameter description for average Luminance	Symbol	Value	Unit
Luminance in Azimuth Plane	Bc	refer Table 2	cd/sq.m.
Intensity at angle Gamma in given azimuth plane	I	from data	cd/klm
Number of lamps	N	1	
Output of each lamp(initial lumens as specified)	F	80	lm
Multiplying factor	K	1	
Luminous area in horizontal plane used in calculations	A	0.01	sq.m.
Angle to the downward vertical from light centre	Gamma	from data	deg

Table 1. Calculation parameters for determination of CIBSE LG3:1996 Average Luminance

G	C plane(deg)																		
deg	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
55	2797	2737	2681	2631	2580	2539	2509	2505	2514	2530	2539	2555	2582	2633	2697	2770	2848	2922	2989
60	2718	2641	2573	2515	2463	2425	2403	2415	2439	2467	2470	2475	2490	2537	2600	2677	2770	2860	2943
65	2630	2528	2444	2378	2330	2301	2294	2325	2367	2407	2403	2396	2398	2436	2495	2574	2683	2794	2897
70	2510	2374	2268	2194	2160	2154	2170	2205	2247	2287	2294	2297	2305	2328	2372	2441	2580	2719	2839
75	2323	2143	2007	1917	1890	1898	1931	1971	2018	2063	2084	2102	2122	2138	2176	2247	2409	2585	2752
80	1974	1723	1536	1415	1385	1407	1462	1519	1583	1646	1680	1709	1741	1762	1812	1907	2124	2363	2598
85	977	580	368	339	604	977	1378	1630	1804	1882	1759	1566	1352	1162	1046	1053	1369	1776	2216

Table 2. Average Luminance(cd/sq.m.) for defined C plane,Gamma angle

CIBSE Category	Gamma (deg)	Average Luminance		Patch Luminance	
		maximum calculated	specified maximum	maximum measured	specified maximum
Category 1	55 to 90	2989	200	---	500
Category 2	65 to 90	2897	200	---	500
Category 3	75 to 90	2752	200	---	500

Table 3. Tabulation of Average and Patch Luminance(cd/sq.m.) for defined CIBSE categories

No match

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: C-SFR-F23B-VB-D24CV-A-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4						
5	32.3	32.2	32.1	32.1	32.1	32.2	32.4	32.5	32.6	32.5	32.5	32.4						
10	31.7	31.4	31.2	31.2	31.3	31.6	31.9	32.2	32.4	32.3	32.2	32.0						
15	31.0	30.7	30.4	30.4	30.6	30.9	31.4	31.7	32.1	32.0	31.8	31.5						
20	29.7	29.3	28.9	28.9	29.1	29.6	30.2	30.7	31.1	31.0	30.8	30.3						
25	28.6	28.1	27.8	27.8	28.0	28.5	29.2	29.8	30.3	30.2	29.9	29.3						
30	26.7	26.1	25.8	25.8	26.1	26.6	27.4	28.1	28.6	28.5	28.2	27.6						
35	25.3	24.6	24.3	24.1	24.5	25.2	26.1	26.8	27.4	27.2	26.9	26.2						
40	22.9	22.2	21.5	21.3	21.8	22.8	23.8	24.6	25.2	24.4	24.7	23.9						
45	21.1	20.4	19.6	19.5	20.0	21.1	22.1	22.9	23.6	22.9	23.0	22.2						
50	18.4	17.6	16.8	16.8	17.2	18.4	19.5	20.3	21.0	20.5	20.4	19.5						
55	16.5	15.6	14.9	15.0	15.3	16.4	17.6	18.5	18.9	18.5	18.6	17.6						
60	13.6	12.6	12.0	12.3	12.5	13.4	14.7	15.6	15.9	16.0	15.8	14.7						
65	11.6	10.6	10.1	10.6	10.6	11.4	12.7	13.6	14.2	14.1	13.8	12.8						
70	8.58	7.50	7.42	7.82	7.88	8.35	9.71	10.0	11.3	10.6	11.0	9.78						
75	6.53	5.47	5.49	5.84	5.98	6.32	7.63	8.52	9.44	8.51	9.06	7.77						
80	3.43	2.46	2.54	2.86	3.02	3.31	4.51	5.43	6.60	6.10	6.18	4.71						
85	1.37	0.59	1.27	1.70	1.30	1.36	2.44	3.44	4.57	4.51	4.19	2.71						
90	0.00	0.10	1.05	1.42	0.99	0.25	0.00	0.66	1.63	1.92	1.41	0.12						
95	0.00	0.10	0.93	1.20	0.93	0.25	0.00	0.02	0.64	1.04	0.75	0.00						
100	0.00	0.07	0.68	0.87	0.61	0.19	0.00	0.05	0.65	0.80	0.67	0.00						
105	0.00	0.00	0.63	0.86	0.55	0.09	0.00	0.07	0.58	0.69	0.57	0.00						
110	0.00	0.00	0.71	1.03	0.57	0.04	0.00	0.03	0.50	0.50	0.48	0.00						
115	0.00	0.00	0.68	1.07	0.64	0.02	0.00	0.00	0.49	0.46	0.48	0.00						
120	0.00	0.03	0.58	0.90	0.48	0.01	0.00	0.00	0.35	0.48	0.42	0.00						
125	0.00	0.01	0.53	0.78	0.35	0.00	0.00	0.00	0.25	0.43	0.36	0.00						
130	0.00	0.00	0.46	0.64	0.23	0.00	0.00	0.00	0.17	0.37	0.29	0.00						
135	0.00	0.00	0.39	0.58	0.15	0.00	0.00	0.00	0.13	0.33	0.28	0.00						
140	0.00	0.00	0.09	0.37	0.00	0.00	0.00	0.00	0.05	0.29	0.19	0.00						
145	0.00	0.00	0.00	0.09	0.00	0.00	0.00	0.00	0.00	0.21	0.08	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.02	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.02	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks: