


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 14.53 lm/W			
MODEL	3014	I _{max} (cd)	21.62	S/MH(C0/180)	1.23
NOMINAL POWER(W)	4.5	LOR(%)	122.1	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	61.040	η UP, DN(C0-180)	0.4, 57.4
NOMINAL FLUX(lm)	50	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 64.2
LAMPS INSIDE	1	η up(%)	0.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	η down(%)	121.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

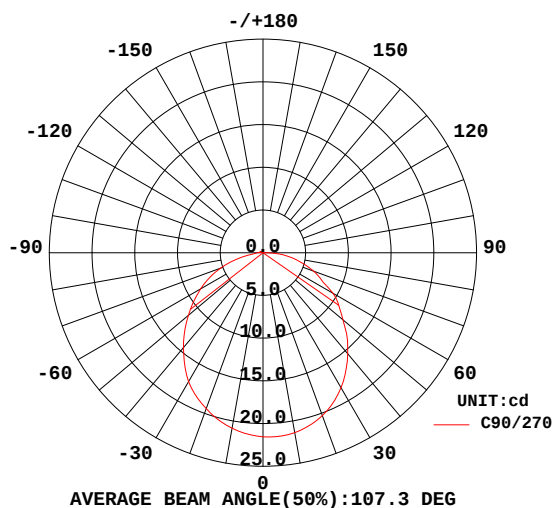

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

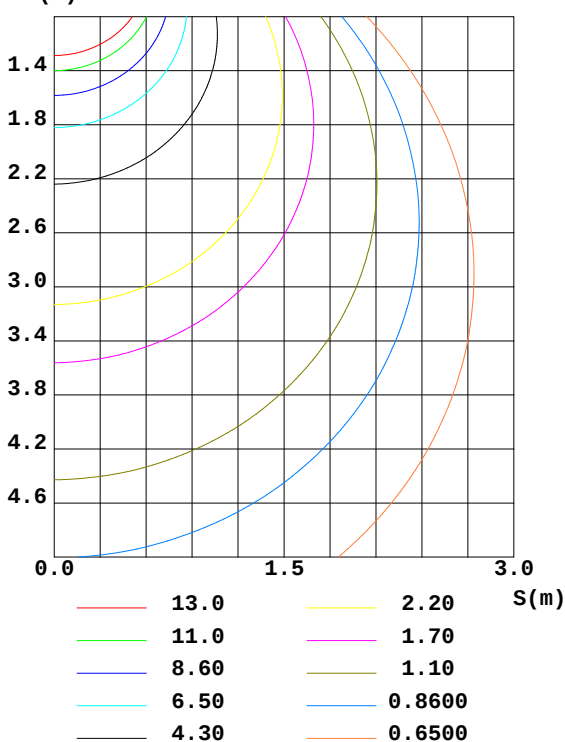

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	21.05	20.86	20.85	20.99	21.23	21.40	21.38	21.28	0- 10	2.037	2.037	3.34, 4.07
20	19.75	19.45	19.43	19.67	20.11	20.45	20.29	20.20	10- 20	5.819	7.856	12.9, 15.7
30	17.75	17.40	17.42	17.72	18.28	18.72	18.26	18.37	20- 30	8.779	16.63	27.3, 33.3
40	15.18	14.69	14.50	15.08	15.84	16.36	15.42	15.92	30- 40	10.50	27.13	44.5, 54.3
50	12.18	11.58	11.41	12.01	12.93	13.49	12.24	13.00	40- 50	10.77	37.90	62.1, 75.8
60	8.921	8.269	8.415	8.724	9.701	10.24	9.431	9.778	50- 60	9.682	47.58	77.9, 95.2
70	5.522	4.991	5.318	5.446	6.305	6.884	6.334	6.446	60- 70	7.464	55.04	90.2, 110
80	2.021	1.621	1.902	2.066	2.789	3.489	3.448	3.087	70- 80	4.461	59.51	97.5, 119
90	0	0.2182	0.6867	0.2023	0	0.2149	0.6001	0.1947	80- 90	1.273	60.78	99.6, 122
100	0	0.0782	0.2776	0.0569	0	0.0372	0.1390	0.0443	90-100	0.1432	60.92	99.8, 122
110	0	0.0886	0.3703	0.0531	0	0.0018	0.0001	0.0018	100-110	0.0570	60.98	99.9, 122
120	0	0.0285	0.2739	0.0037	0	0	0	0	110-120	0.0477	61.03	100, 122
130	0	0	0.0497	0	0	0	0	0	120-130	0.0124	61.04	100, 122
140	0	0	0	0	0	0	0	0	130-140	0.0007	61.04	100, 122
150	0	0	0	0	0	0	0	0	140-150	0	61.04	100, 122
160	0	0	0	0	0	0	0	0	150-160	0	61.04	100, 122
170	0	0	0	0	0	0	0	0	160-170	0	61.04	100, 122
180	0	0	0	0	0	0	0	0	170-180	0	61.04	100, 122
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M	TYPE:	WEIGHT: 0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.: 10*1000mm	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.45	1.45	1.45	1.42	1.42	1.42	1.35	1.35	1.35	1.29	1.29	1.29	1.24	1.24	1.24	1.22
1.0	1.26	1.21	1.16	1.24	1.19	1.14	1.18	1.14	1.11	1.13	1.10	1.07	1.09	1.06	1.04	1.01
2.0	1.10	1.02	.95	1.08	.90	.93	1.03	.97	.91	.99	.94	.89	.95	.91	.87	.84
3.0	.97	.87	.78	.95	.85	.78	.91	.83	.76	.87	.81	.75	.84	.78	.74	.71
4.0	.86	.75	.66	.84	.74	.66	.81	.72	.65	.78	.70	.64	.75	.69	.63	.60
5.0	.76	.65	.57	.75	.65	.57	.72	.63	.56	.70	.62	.55	.68	.60	.55	.52
6.0	.69	.58	.50	.68	.57	.50	.65	.56	.49	.63	.55	.49	.61	.54	.48	.46
7.0	.62	.52	.44	.61	.51	.44	.59	.50	.43	.58	.49	.43	.56	.48	.43	.40
8.0	.57	.46	.39	.56	.46	.39	.54	.45	.39	.53	.45	.39	.51	.44	.38	.36
9.0	.52	.42	.35	.51	.42	.35	.50	.41	.35	.49	.41	.35	.47	.40	.35	.32
10.0	.48	.39	.32	.48	.38	.32	.46	.38	.32	.45	.37	.32	.44	.37	.31	.29

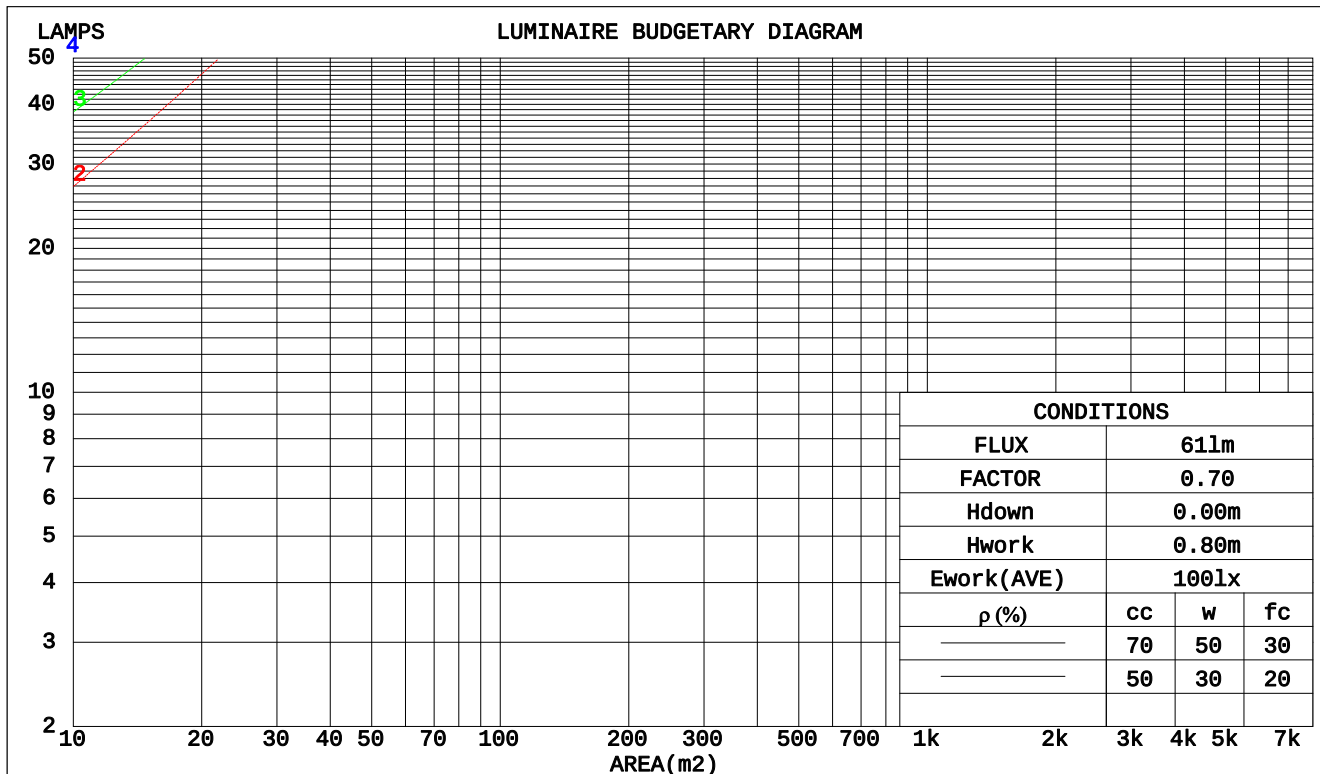

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: shan
Test Date: 2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V1.0.257
Humidity: 45.0%
Test Distance: 6.950m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)										
0.0																	
1.0	.382	.217	.069	.373	.213	.068	.357	.205	.065	.341	.197	.063	.327	.190	.061		
2.0	.358	.196	.060	.350	.193	.059	.336	.187	.058	.322	.181	.057	.310	.175	.055		
3.0	.331	.176	.053	.324	.173	.052	.311	.169	.051	.299	.164	.050	.288	.159	.049		
4.0	.305	.158	.047	.299	.156	.046	.287	.152	.046	.277	.149	.045	.267	.145	.044		
5.0	.282	.143	.042	.276	.142	.041	.266	.138	.041	.256	.135	.040	.248	.132	.040		
6.0	.261	.131	.037	.256	.129	.037	.247	.127	.037	.239	.124	.036	.231	.121	.036		
7.0	.243	.120	.034	.238	.119	.034	.230	.116	.034	.223	.114	.033	.216	.112	.033		
8.0	.227	.111	.031	.223	.110	.031	.216	.108	.031	.209	.106	.031	.202	.104	.030		
9.0	.212	.103	.029	.209	.102	.029	.202	.100	.028	.196	.098	.028	.190	.097	.028		
10.0	.200	.096	.027	.197	.095	.026	.191	.093	.026	.185	.092	.026	.180	.090	.026		

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.237	.237	.237	.202	.202	.202	.138	.138	.138	.079	.079	.079	.025	.025	.025	
1.0	.224	.195	.168	.192	.167	.144	.131	.115	.100	.076	.066	.058	.024	.021	.019	
2.0	.215	.165	.123	.184	.142	.107	.126	.098	.074	.073	.057	.044	.023	.018	.014	
3.0	.205	.144	.095	.176	.124	.082	.121	.086	.058	.070	.050	.034	.022	.016	.011	
4.0	.196	.127	.075	.168	.110	.065	.115	.077	.046	.067	.045	.027	.021	.015	.009	
5.0	.187	.115	.062	.160	.099	.054	.110	.069	.038	.064	.041	.022	.021	.013	.007	
6.0	.178	.104	.052	.153	.090	.045	.105	.063	.032	.061	.037	.019	.020	.012	.006	
7.0	.169	.096	.045	.146	.083	.039	.101	.058	.028	.059	.034	.016	.019	.011	.005	
8.0	.162	.089	.039	.139	.077	.034	.096	.054	.024	.056	.032	.014	.018	.010	.005	
9.0	.154	.083	.035	.133	.072	.030	.092	.051	.022	.054	.030	.013	.017	.010	.004	
10.0	.147	.078	.032	.127	.067	.028	.088	.047	.020	.051	.028	.012	.017	.009	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

Uncorrected UGR Table

NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M						TYPE:			WEIGHT:0.126Kg/m		
DIM.: 10*10mm						SPEC.:			SERIAL No.:		
MFR.:						SUR.:10*1000mm			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.7	16.2	14.9	16.4	16.6	14.4	15.9	14.6	16.1	16.3	
	3H	16.1	17.5	16.4	17.8	18.0	15.9	17.3	16.2	17.5	17.8
	4H	16.7	18.0	17.0	18.3	18.6	16.4	17.8	16.8	18.0	18.3
	6H	17.0	18.3	17.4	18.6	18.9	16.8	18.0	17.1	18.3	18.6
	8H	17.1	18.3	17.4	18.6	18.9	16.8	18.0	17.2	18.3	18.6
	12H	17.1	18.2	17.4	18.5	18.9	16.9	18.0	17.2	18.3	18.6
4H	2H	15.2	16.5	15.5	16.8	17.0	14.9	16.3	15.3	16.5	16.8
	3H	16.8	18.0	17.2	18.3	18.6	16.6	17.8	17.0	18.1	18.4
	4H	17.5	18.5	17.8	18.9	19.2	17.3	18.4	17.7	18.7	19.0
	6H	17.9	18.8	18.3	19.2	19.6	17.7	18.7	18.1	19.0	19.4
	8H	18.0	18.9	18.4	19.2	19.6	17.8	18.7	18.2	19.0	19.4
	12H	18.0	18.8	18.4	19.2	19.6	17.9	18.7	18.3	19.1	19.5
8H	4H	17.6	18.5	18.1	18.9	19.3	17.5	18.4	17.9	18.8	19.1
	6H	18.1	18.9	18.6	19.3	19.7	18.0	18.7	18.4	19.1	19.6
	8H	18.2	18.9	18.7	19.3	19.8	18.1	18.8	18.6	19.2	19.7
	12H	18.2	18.8	18.7	19.3	19.8	18.2	18.8	18.7	19.2	19.7
12H	4H	17.6	18.4	18.1	18.8	19.2	17.5	18.3	17.9	18.7	19.1
	6H	18.1	18.8	18.6	19.2	19.7	18.0	18.7	18.5	19.1	19.5
	8H	18.3	18.8	18.7	19.3	19.8	18.1	18.7	18.6	19.1	19.6
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.1 / - 0.3					+ 0.1 / - 0.3					
2.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.2					

CIE Pub.117 Corrected 50.00 lm Total Lamp Luminous Flux.(8log(F/F0) = -10.4)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M	TYPE:	WEIGHT: 0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.: 10*1000mm	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	70	56	47	69	56	47	68	55	47	39
0.80	82	68	59	81	68	59	79	67	58	50
1.00	92	79	70	91	78	70	88	80	69	60
1.25	101	88	79	99	87	79	96	86	78	69
1.50	107	95	86	105	94	86	101	92	84	75
2.00	116	105	97	113	103	96	109	101	94	85
2.50	120	111	103	118	109	102	113	106	100	90
3.00	124	116	109	122	114	108	117	110	105	95
4.00	129	122	117	126	120	115	121	116	112	101
5.00	132	126	121	129	124	119	124	119	116	104
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: shan
Test Date: 2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V1.0.257
Humidity: 45.0%
Test Distance: 6.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M	TYPE:	WEIGHT: 0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.: 10*1000mm	PROTECTION ANGLE:

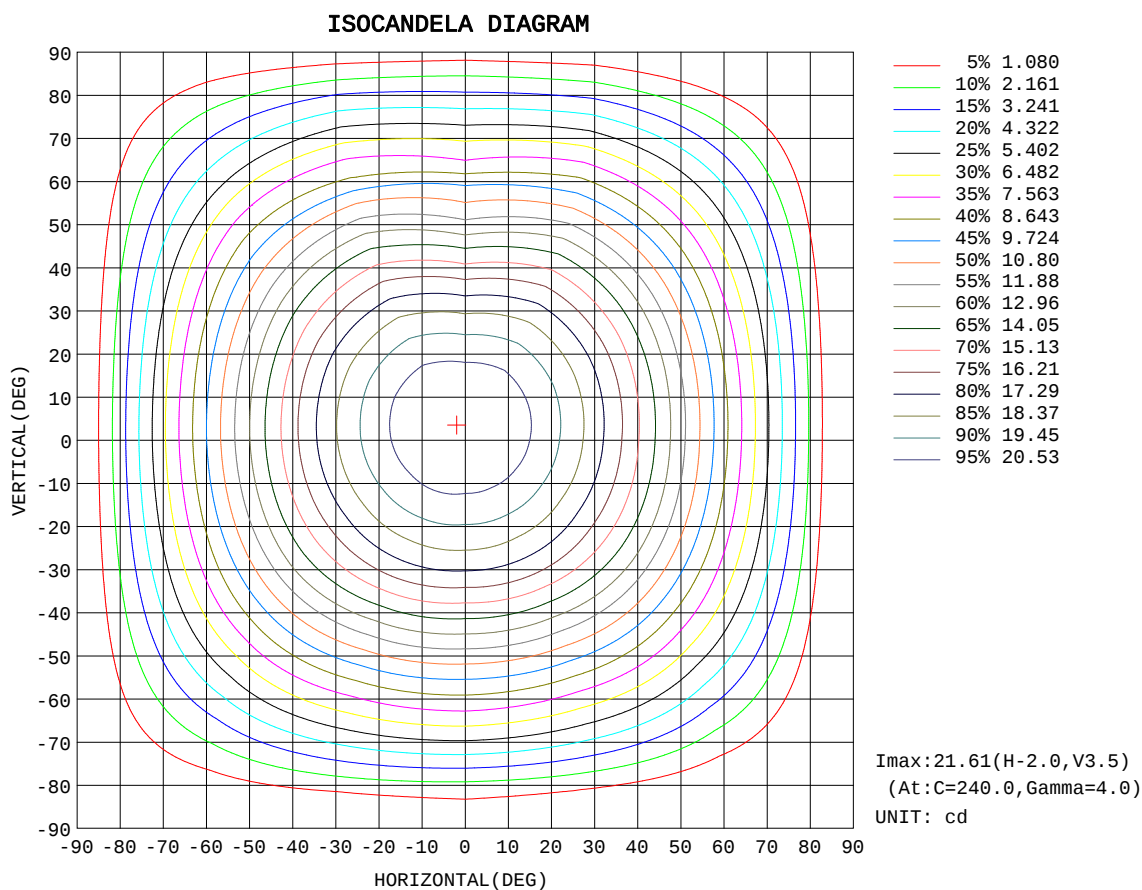


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: shan
Test Date: 2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity: 45.0%
Test Distance: 6.950m [K=1.0000]
Remarks:

AAI Figure

NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M	TYPE:	WEIGHT: 0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.: 10*1000mm	PROTECTION ANGLE:

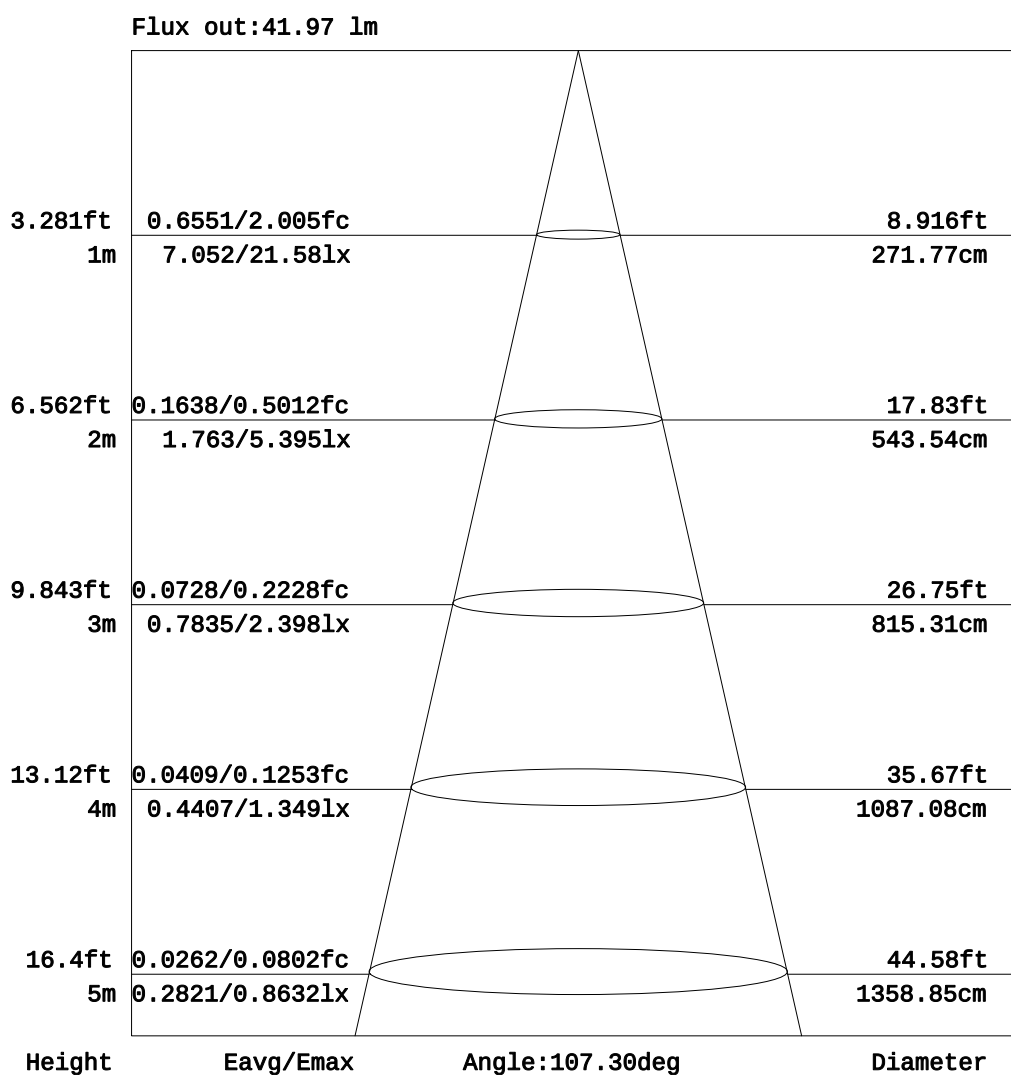


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: shan
Test Date: 2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V1.0.257
Humidity: 45.0%
Test Distance: 6.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

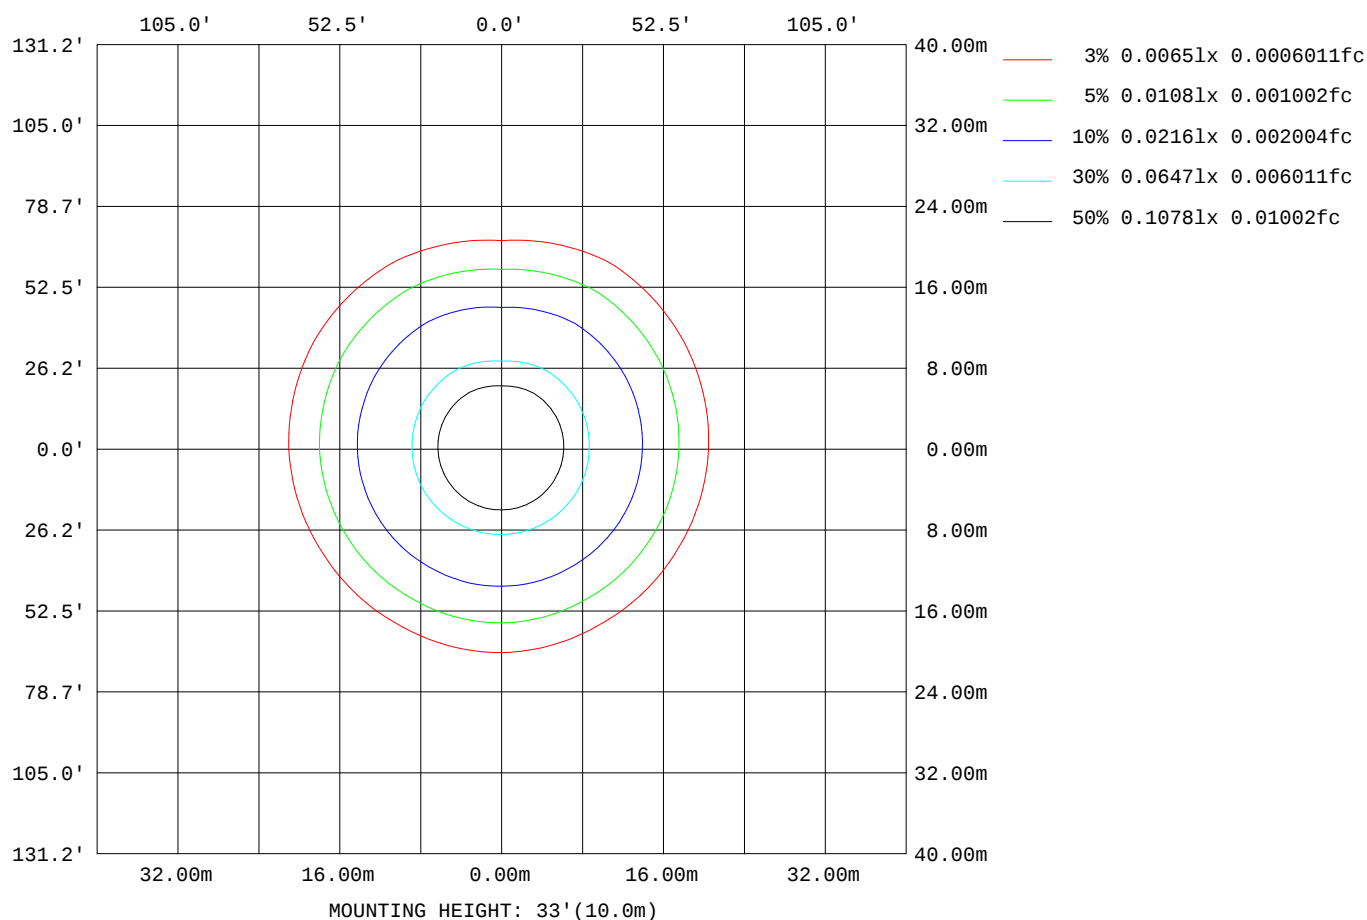

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:shan
 Test Date:2018-10-09

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V1.0.257
 Humidity:45.0%
 Test Distance:6.950m [K=1.0000]
 Remarks:

Average Luminance Table(CIBSE)

NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

Parameter description for average Luminance	Symbol	Value	Unit
Luminance in Azimuth Plane	Bc	refer Table 2	cd/sq.m.
Intensity at angle Gamma in given azimuth plane	I	from data	cd/klm
Number of lamps	N	1	
Output of each lamp(initial lumens as specified)	F	50	lm
Multiplying factor	K	1	
Luminous area in horizontal plane used in calculations	A	0.01	sq.m.
Angle to the downward vertical from light centre	Gamma	from data	deg

Table 1. Calculation parameters for determination of CIBSE LG3:1996 Average Luminance

G deg	C plane(deg)																		
	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
55	1844	1815	1787	1763	1737	1716	1702	1704	1712	1724	1729	1737	1752	1785	1823	1865	1905	1944	1980
60	1784	1743	1707	1678	1653	1637	1629	1643	1663	1683	1684	1685	1691	1719	1756	1798	1846	1894	1940
65	1712	1655	1611	1579	1560	1552	1556	1581	1610	1637	1636	1632	1631	1651	1680	1720	1776	1837	1897
70	1615	1539	1484	1449	1441	1450	1470	1498	1528	1555	1560	1561	1563	1571	1590	1622	1690	1767	1844
75	1462	1361	1290	1248	1247	1266	1299	1332	1367	1398	1411	1420	1429	1433	1448	1480	1567	1665	1759
80	1164	1036	947	896	897	926	971	1013	1056	1095	1116	1134	1150	1160	1184	1230	1343	1474	1606
85	350	208	132	109	256	456	669	833	956	1022	947	829	700	597	539	548	730	973	1236

Table 2. Average Luminance(cd/sq.m.) for defined C plane,Gamma angle

CIBSE Category	Gamma (deg)	Average Luminance		Patch Luminance	
		maximum calculated	specified maximum	maximum measured	specified maximum
Category 1	55 to 90	1980	200	---	500
Category 2	65 to 90	1897	200	---	500
Category 3	75 to 90	1759	200	---	500

Table 3. Tabulation of Average and Patch Luminance(cd/sq.m.) for defined CIBSE categories

No match

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: C-SFR-F23B-VB-D24CV-B-144-3014-1M	TYPE:	WEIGHT:0.126Kg/m
DIM.: 10*10mm	SPEC.:	SERIAL No.:
MFR.:	SUR.:10*1000mm	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5						
5	21.4	21.4	21.3	21.4	21.4	21.4	21.5	21.6	21.6	21.6	21.6	21.5						
10	21.0	20.9	20.8	20.9	20.9	21.1	21.2	21.4	21.4	21.4	21.3	21.2						
15	20.6	20.4	20.4	20.4	20.5	20.6	20.9	21.1	21.2	21.1	21.0	20.8						
20	19.8	19.5	19.4	19.4	19.5	19.8	20.1	20.4	20.5	20.3	20.3	20.1						
25	19.0	18.7	18.6	18.7	18.8	19.1	19.5	19.8	19.9	19.6	19.7	19.4						
30	17.8	17.4	17.4	17.4	17.6	17.9	18.3	18.6	18.8	18.3	18.5	18.2						
35	16.8	16.4	16.4	16.3	16.6	16.9	17.4	17.8	17.9	17.2	17.6	17.3						
40	15.2	14.8	14.5	14.5	14.8	15.4	15.8	16.3	16.4	15.4	16.1	15.7						
45	14.0	13.7	13.3	13.3	13.6	14.2	14.7	15.2	15.3	14.2	15.0	14.6						
50	12.2	11.8	11.4	11.4	11.7	12.4	12.9	13.4	13.6	12.2	13.2	12.8						
55	10.9	10.4	10.1	10.2	10.4	11.0	11.7	12.1	12.3	11.1	12.0	11.5						
60	8.92	8.39	8.15	8.41	8.46	8.99	9.70	10.2	10.3	9.43	10.0	9.53						
65	7.58	7.03	6.88	7.23	7.20	7.61	8.35	8.82	8.69	7.81	8.71	8.19						
70	5.52	4.96	5.03	5.32	5.34	5.55	6.31	6.78	6.99	6.33	6.75	6.15						
75	4.14	3.57	3.70	3.96	4.03	4.17	4.90	5.19	5.68	5.13	5.43	4.79						
80	2.02	1.56	1.69	1.90	2.00	2.14	2.79	3.23	3.74	3.45	3.47	2.71						
85	0.67	0.27	0.66	0.96	0.72	0.80	1.41	1.90	2.30	2.32	2.15	1.36						
90	0.00	0.00	0.44	0.69	0.40	0.00	0.00	0.06	0.37	0.60	0.39	0.00						
95	0.00	0.00	0.33	0.53	0.35	0.00	0.00	0.00	0.02	0.24	0.14	0.00						
100	0.00	0.00	0.16	0.28	0.11	0.00	0.00	0.00	0.07	0.14	0.09	0.00						
105	0.00	0.00	0.13	0.26	0.04	0.00	0.00	0.00	0.04	0.09	0.04	0.00						
110	0.00	0.00	0.18	0.37	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.15	0.39	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.06	0.27	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:shan
Test Date:2018-10-09

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V1.0.257
Humidity:45.0%
Test Distance:6.950m [K=1.0000]
Remarks: