


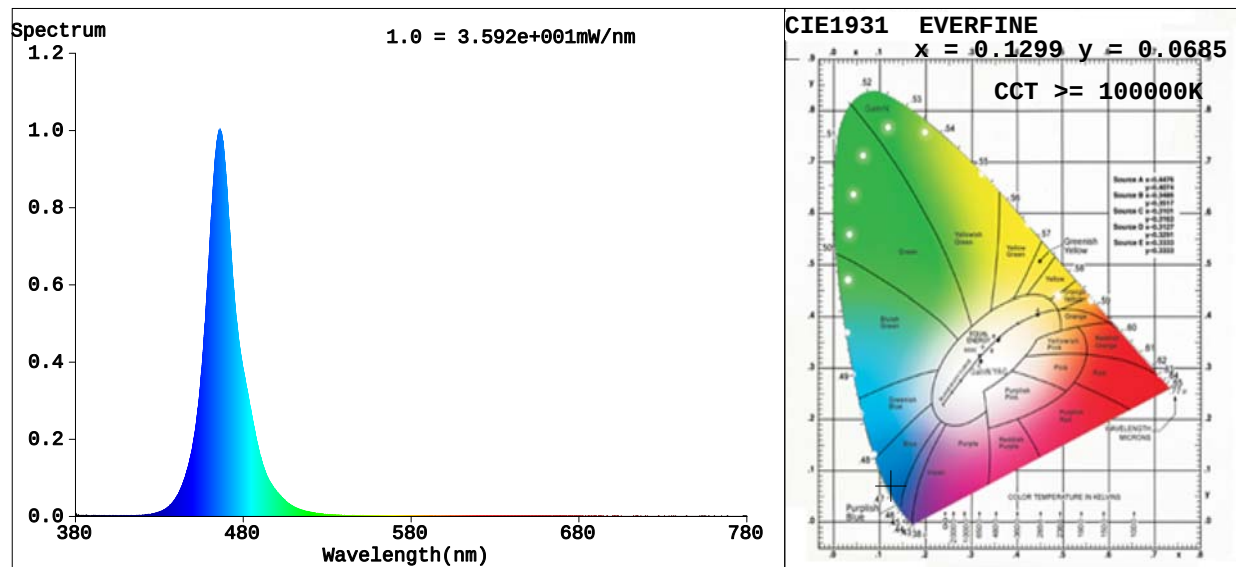

## Colorimetric Parameters

Chromaticity Coordinate:  $x=0.1299$   $y=0.0685$   $u'=0.1459$   $v'=0.1730$

CCT=100000K (Duv=0.1545) Dominant WL:Ld =470.4nm Purity=96.8%

Peak WL:Lp=466.3nm FWHM=18.9nm

Render Index: Ra=0.2 Render Index: AvgR =0.1

|       |       |       |       |       |       |       |       |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R1 =0 | R2 =0 | R3 =0 | R4 =0 | R5 =2 | R6 =0 | R7 =0 |       |
| R8 =0 | R9 =0 | R10=0 | R11=0 | R12=0 | R13=0 | R14=0 | R15=0 |

## Photometric & Radiometric Parameters

Flux=65.23 lm Eff.:15.54 lm/W Fe=885.9 mW

## Electrical parameters

V=24.0 V I=0.1749 A P=4.2 W PF=1.000 F=0.00 Hz

Status: Integral T = 152 ms Ip = 49100 (75%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F23B-VB-D24CV-B-144-3014-1M

Test By:SHAN

Temperature:25.3Deg

Manufacturer:

Assessor:

Date:2018-09-25 09:28:24

Humidity:63.0%

Remarks:

Standard: