


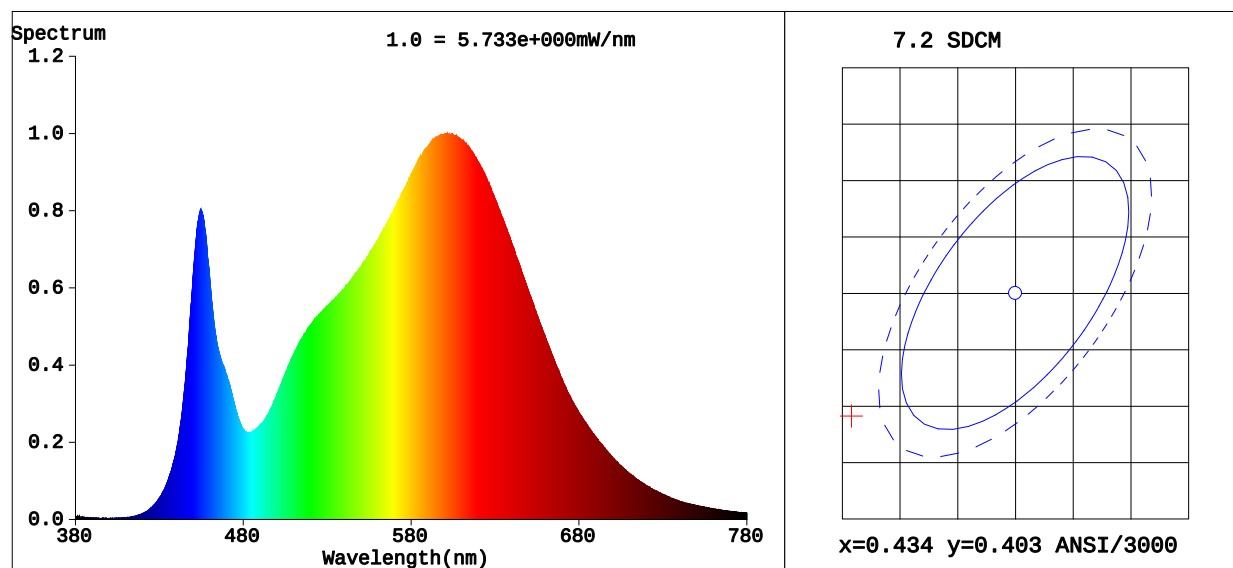

Colorimetric Parameters

Chromaticity Coordinate: $x=0.4197$ $y=0.3924$ $u'=0.2444$ $v'=0.5141$

CCT=3215K(Duv=-0.0021) Dominant WL:Ld =582.8nm Purity=43.7%

Peak WL:Lp=601.6nm FWHM=138.1nm

Render Index:Ra=83.8 Render Index:AvgR =78.3

R1 =83	R2 =93	R3 =96	R4 =81	R5 =83	R6 =90	R7 =83	
R8 =62	R9 =14	R10=82	R11=80	R12=67	R13=86	R14=99	R15=77

Photometric & Radiometric Parameters

Flux=292.8 lm Eff.:69.52 lm/W Fe=901.9 mW

Electrical parameters

V=24 V I=0.1755 A P=4.212 W PF=1.000 F=0.00 Hz

Status: Integral T = 689 ms Ip = 55127 (84%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F23B-VB-D24CV-W3000-144-3014-1M

Test By:SHAN

Temperature:25.3Deg

Manufacturer:

Assessor:

Date:2018-08-14 14:13:59

Humidity:63.0%

Remarks:

Standard: