


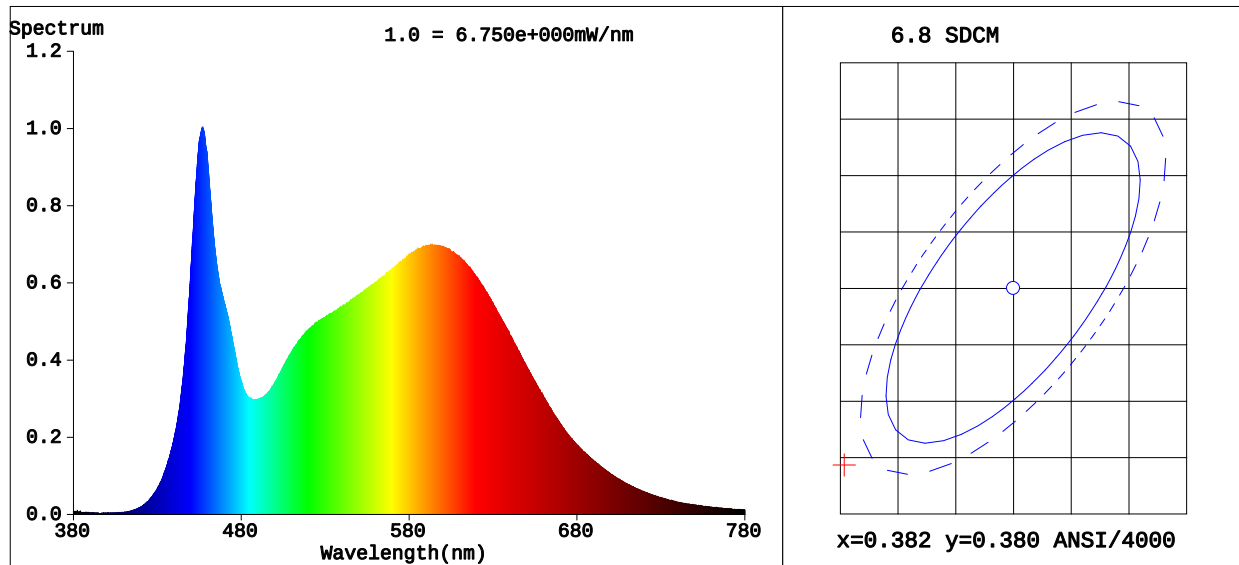

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3671$ $y=0.3640$ $u'=0.2214$ $v'=0.4938$

CCT=4299K(Duv=-0.0020) Dominant WL:Ld =579.3nm Purity=19.4%

Peak WL:Lp=457.0nm FWHM=24.5nm

Render Index:Ra=86.5 Render Index:AvgR =81.6

R1 =87	R2 =96	R3 =95	R4 =82	R5 =86	R6 =91	R7 =85	
R8 =70	R9 =28	R10=88	R11=81	R12=63	R13=90	R14=98	R15=82

Photometric & Radiometric Parameters

Flux=278.3 lm Eff.:65 lm/W Fe=883.2 mW

Electrical parameters

V=24 V I=0.1783 A P=4.28 W PF=1.000 F=0.00 Hz

Status: Integral T = 776 ms Ip = 51870 (79%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F23B-VB-D24CV-W4000-144-3014-1M

Test By:SHAN

Temperature:25.3Deg

Manufacturer:

Assessor:

Date:2018-08-14 14:52:24

Humidity:63.0%

Remarks:

Standard: