


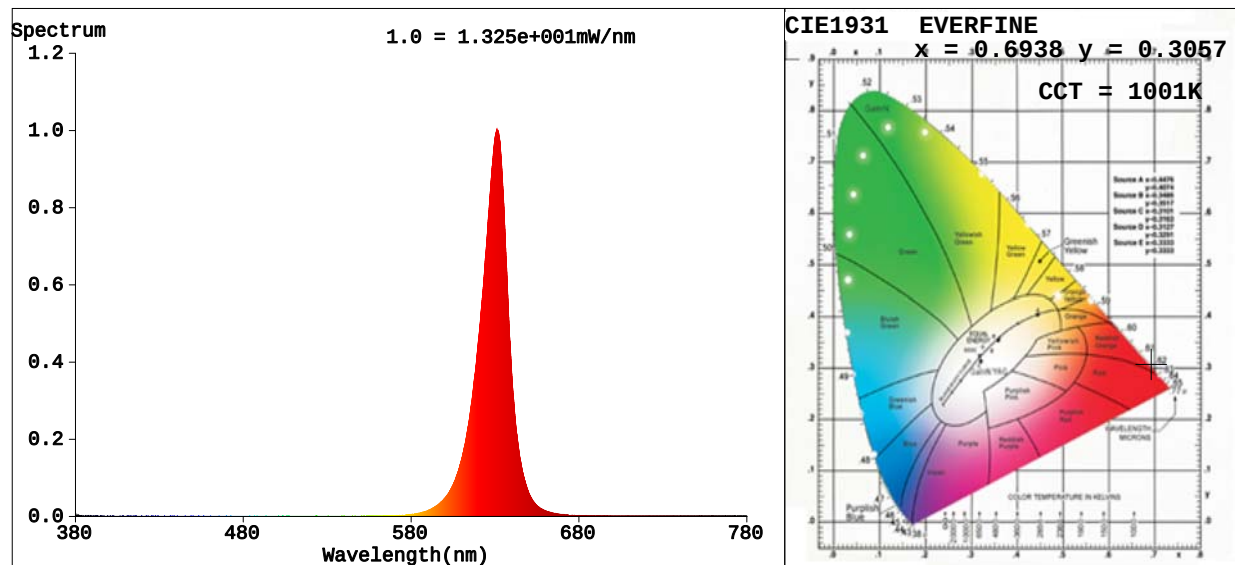

Colorimetric Parameters

Chromaticity Coordinate: $x=0.6938$ $y=0.3057$ $u'=0.5256$ $v'=0.5210$

CCT=1001K (Duv=-0.0780) Dominant WL:Ld =621.4nm Purity=99.9%

Peak WL:Lp=631.0nm FWHM=17.2nm

Render Index: Ra=27.3 Render Index: AvgR =30.7

R1 =8	R2 =78	R3 =32	R4 =0	R5 =3	R6 =90	R7 =8	
R8 =0	R9 =0	R10=72	R11=0	R12=79	R13=30	R14=60	R15=0

Photometric & Radiometric Parameters

Flux=56.09 lm Eff.:11.81 lm/W Fe=277.8 mW

Electrical parameters

V=24.0 V I=0.1979 A P=4.75 W PF=1.000 F=0.00 Hz

Status: Integral T = 278 ms Ip = 47226 (72%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGB-56-5050-1M-R

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-27 14:16:46

Humidity:63.0%

Remarks:

Standard:

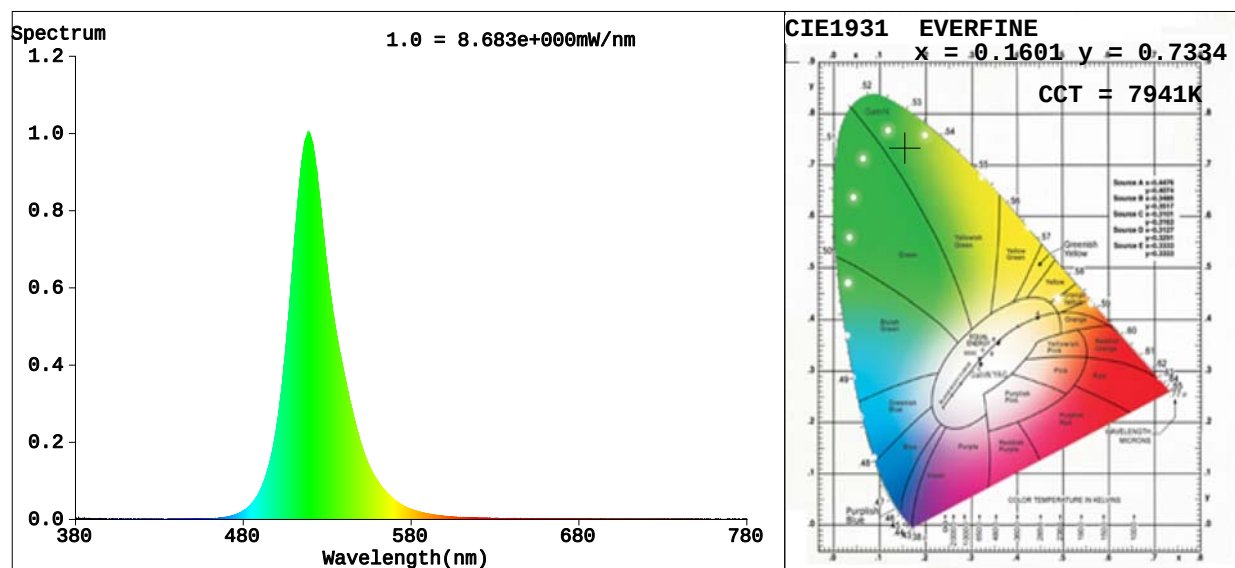

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1601$ $y=0.7334$ $u'=0.0558$ $v'=0.5749$

CCT=7941K (Duv=0.1612) Dominant WL:Ld =525.8nm Purity=81.6%

Peak WL:Lp=519.3nm FWHM=28.4nm

Render Index: Ra=0.0 Render Index: AvgR =2.4

R1 =0	R2 =0	R3 =0	R4 =0	R5 =0	R6 =0	R7 =0	
R8 =0	R9 =0	R10=0	R11=0	R12=0	R13=0	R14=35	R15=0

Photometric & Radiometric Parameters

Flux=145.6 lm Eff.:30.87 lm/W Fe=301.5 mW

Electrical parameters

V=24.0 V I=0.1965 A P=4.72 W PF=1.000 F=0.00 Hz

Status: Integral T = 472 ms Ip = 52541 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGB-56-5050-1M-G

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-27 14:17:17

Humidity:63.0%

Remarks:

Standard:

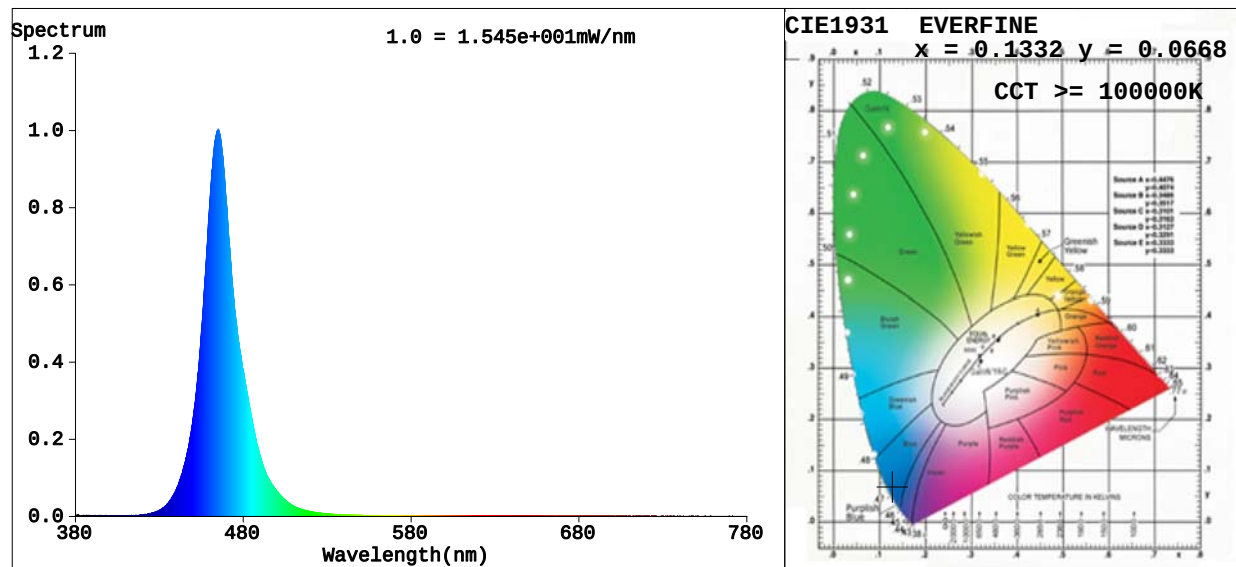

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1332$ $y=0.0668$ $u'=0.1507$ $v'=0.1700$

CCT=100000K (Duv=0.1555) Dominant WL:Ld =469.6nm Purity=96.1%

Peak WL:Lp=465.2nm FWHM=20.5nm

Render Index: Ra=0.9 Render Index: AvgR =0.7

R1 =0	R2 =0	R3 =0	R4 =0	R5 =7	R6 =0	R7 =0	
R8 =0	R9 =0	R10=0	R11=0	R12=0	R13=0	R14=0	R15=3

Photometric & Radiometric Parameters

Flux=29.81 lm Eff.:6.27 lm/W Fe=406.9 mW

Electrical parameters

V=24.0 V I=0.1981 A P=4.75 W PF=1.000 F=0.00 Hz

Status: Integral T = 377 ms Ip = 52488 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGB-56-5050-1M-B

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-27 14:17:52

Humidity:63.0%

Remarks:

Standard:

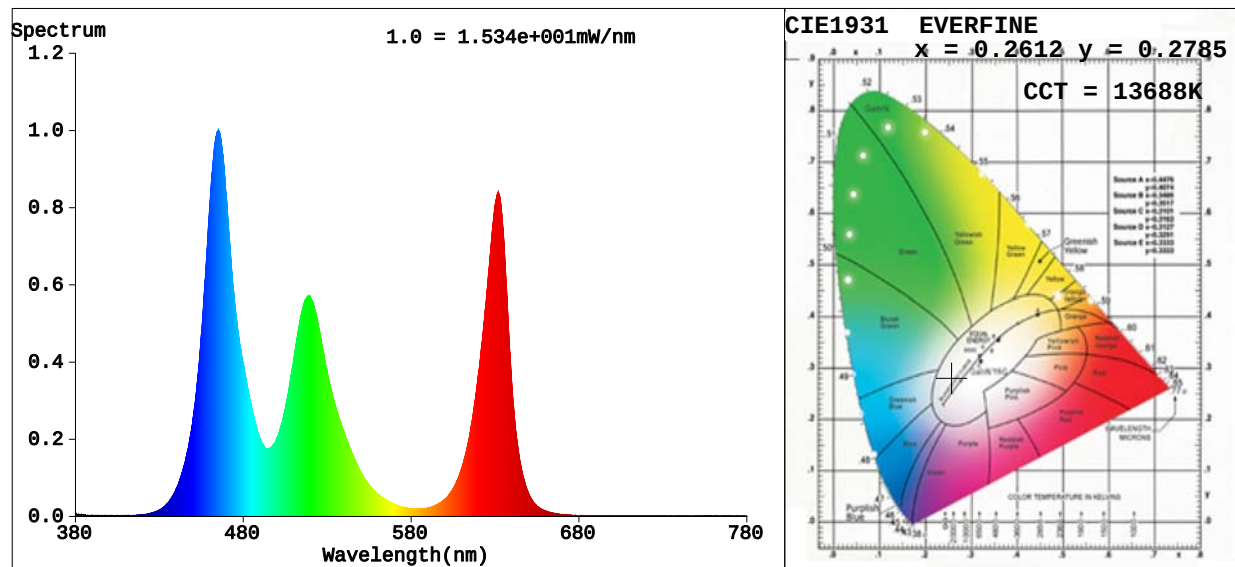

Colorimetric Parameters

Chromaticity Coordinate: $x=0.2612$ $y=0.2785$ $u'=0.1795$ $v'=0.4307$

CCT=13688K(Duv=0.0074) Dominant WL:Ld =481.1nm Purity=29.2%

Peak WL:Lp=465.2nm FWHM=20.8nm

Render Index:Ra=43.8 Render Index:AvgR =37.3

R1 =25	R2 =57	R3 =73	R4 =44	R5 =47	R6 =52	R7 =53	
R8 =0	R9 =0	R10=0	R11=34	R12=59	R13=30	R14=80	R15=7

Photometric & Radiometric Parameters

Flux=227.8 lm Eff.:19.74 lm/W Fe=974.1 mW

Electrical parameters

V=24.0 V I=0.4807 A P=11.54 W PF=1.000 F=0.00 Hz

Status: Integral T = 318 ms Ip = 52327 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGB-56-5050-1M-RGB

Test By:SHAN

Temperature:25.3Deg

Manufacturer:

Assessor:

Date:2018-08-27 14:18:50

Humidity:63.0%

Remarks:

Standard: