


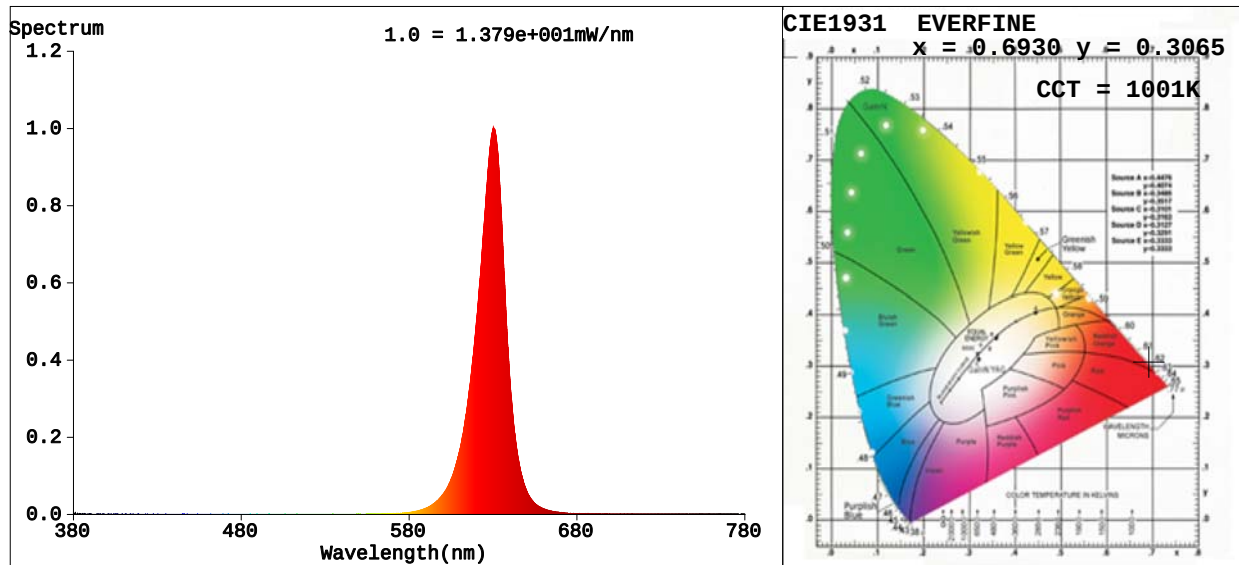

Colorimetric Parameters

Chromaticity Coordinate: $x=0.6930$ $y=0.3065$ $u'=0.5238$ $v'=0.5213$

CCT=1001K (Duv=-0.0762) Dominant WL:Ld =620.9nm Purity=99.9%

Peak WL:Lp=630.2nm FWHM=17.8nm

Render Index: Ra=27.0 Render Index: AvgR =30.5

R1 =8	R2 =78	R3 =31	R4 =0	R5 =2	R6 =90	R7 =7	
R8 =0	R9 =0	R10=72	R11=0	R12=79	R13=30	R14=60	R15=0

Photometric & Radiometric Parameters

Flux=61.19 lm Eff.:12.82 lm/W Fe=297.4 mW

Electrical parameters

V=24.10 V I=0.1981 A P=4.774 W PF=1.000 F=0.00 Hz

Status: Integral T = 296 ms Ip = 52427 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGBW(4000K)-56-5050-1M-R

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-28 14:07:59

Humidity:63.0%

Remarks:

Standard:

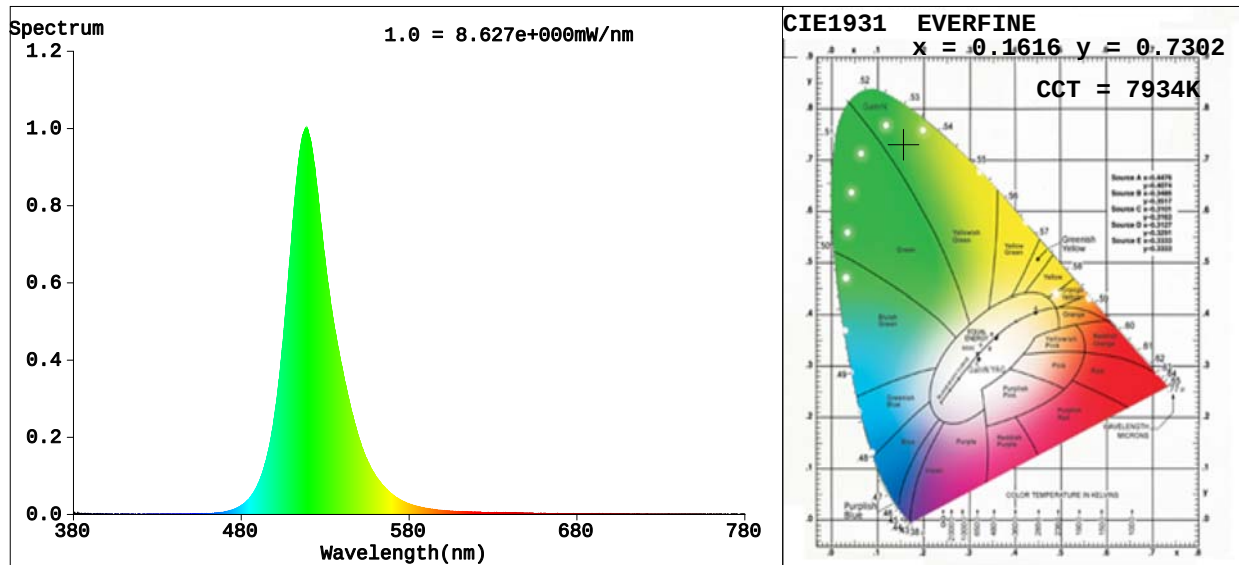

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1616$ $y=0.7302$ $u'=0.0565$ $v'=0.5745$

CCT=7934K (Duv=0.1604) Dominant WL:Ld =525.9nm Purity=81.0%

Peak WL:Lp=518.5nm FWHM=29.0nm

Render Index:Ra=0.0 Render Index:AvgR =2.4

R1 =0	R2 =0	R3 =0	R4 =0	R5 =0	R6 =0	R7 =0	
R8 =0	R9 =0	R10=0	R11=0	R12=0	R13=0	R14=36	R15=0

Photometric & Radiometric Parameters

Flux=146.4 lm Eff.:30.87 lm/W Fe=305.7 mW

Electrical parameters

V=24.10 V I=0.1968 A P=4.742 W PF=1.000 F=0.00 Hz

Status: Integral T = 476 ms Ip = 52528 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGBW(4000K)-56-5050-1M-G

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-28 14:10:13

Humidity:63.0%

Remarks:

Standard:

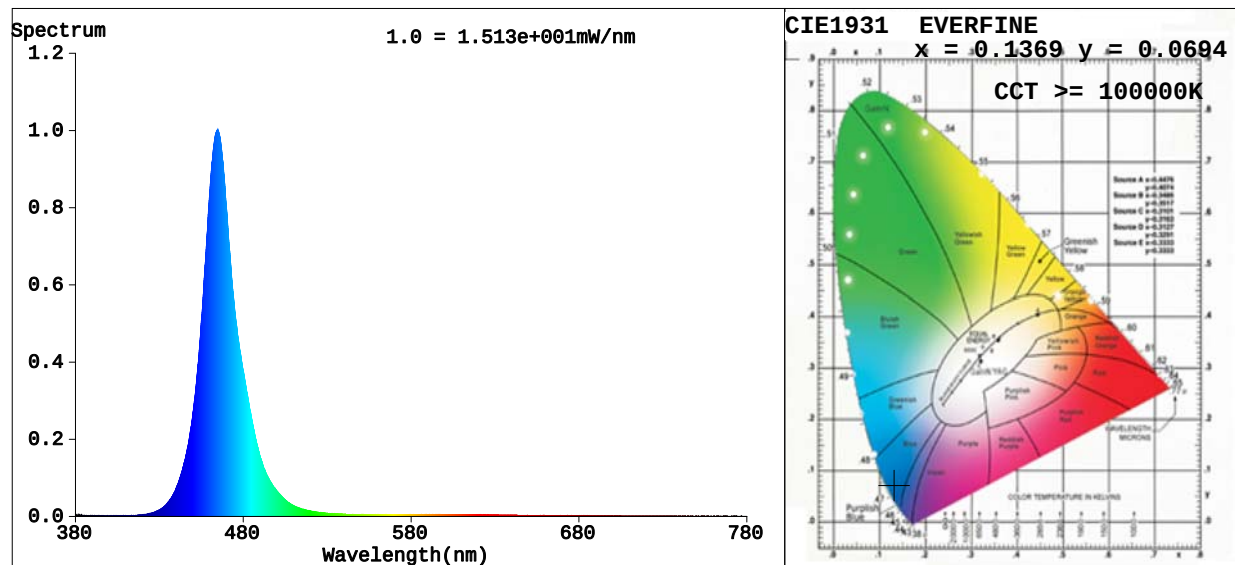

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1369$ $y=0.0694$ $u'=0.1538$ $v'=0.1755$

CCT=100000K (Duv=0.1513) Dominant WL:Ld =469.3nm Purity=94.7%

Peak WL:Lp=464.5nm FWHM=20.9nm

Render Index: Ra=4.2 Render Index: AvgR =3.5

R1 =11	R2 =0	R3 =0	R4 =0	R5 =23	R6 =0	R7 =0	
R8 =0	R9 =0	R10=0	R11=0	R12=0	R13=0	R14=0	R15=18

Photometric & Radiometric Parameters

Flux=31.10 lm Eff.:6.55 lm/W Fe=407.8 mW

Electrical parameters

V=24.10 V I=0.1970 A P=4.747 W PF=1.000 F=0.00 Hz

Status: Integral T = 386 ms Ip = 52424 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGBW(4000K)-56-5050-1M-B

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-28 14:10:51

Humidity:63.0%

Remarks:

Standard:

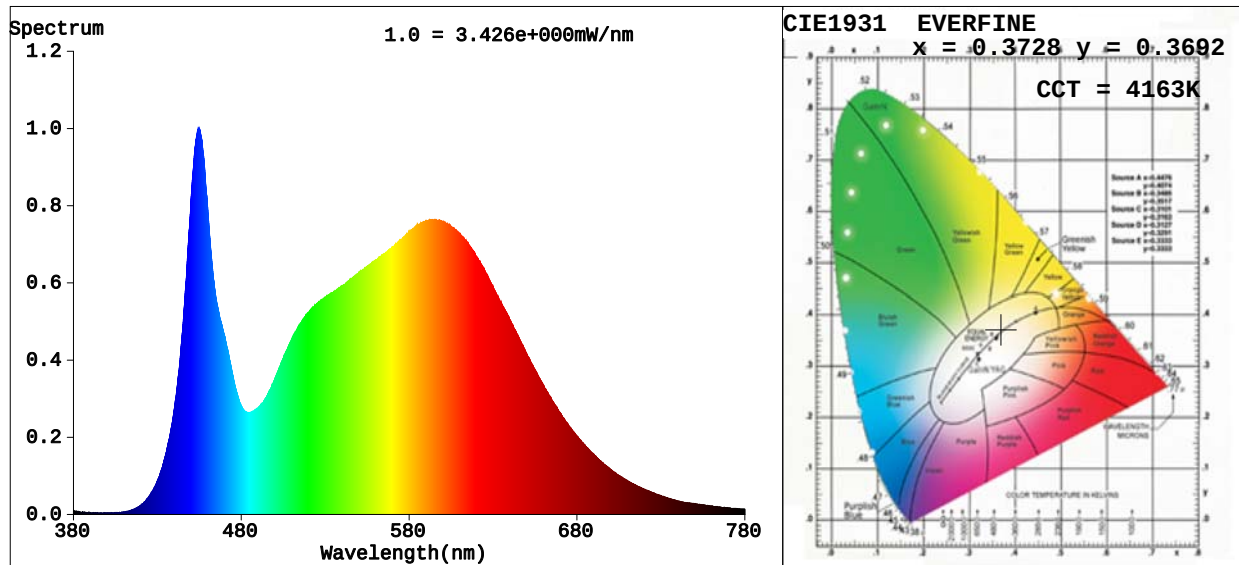

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3728$ $y=0.3692$ $u'=0.2230$ $v'=0.4971$

CCT=4163K (Duv=-0.0012) Dominant WL:Ld =579.2nm Purity=22.7%

Peak WL:Lp=454.7nm FWHM=22.4nm

Render Index: Ra=85.4 Render Index: AvgR =79.5

R1 =85	R2 =92	R3 =96	R4 =83	R5 =84	R6 =88	R7 =87	
R8 =69	R9 =22	R10=80	R11=82	R12=61	R13=87	R14=98	R15=80

Photometric & Radiometric Parameters

Flux=153.4 lm Eff.:32.37 lm/W Fe=479.7 mW

Electrical parameters

V=24.10 V I=0.1966 A P=4.737 W PF=1.000 F=0.00 Hz

Status: Integral T = 1379 ms Ip = 51166 (78%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGBW(4000K)-56-5050-1M-W

Test By:SHAN

Temperature:25.3Deg

Manufacturer:

Assessor:

Date:2018-08-28 14:11:30

Humidity:63.0%

Remarks:

Standard: