


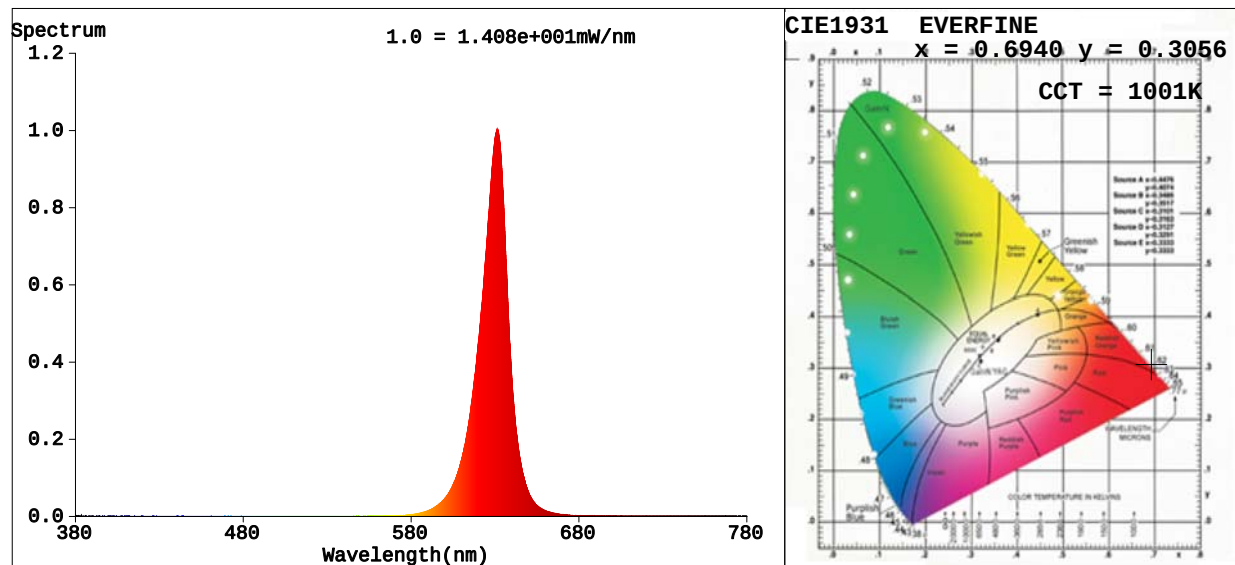

Colorimetric Parameters

Chromaticity Coordinate: $x=0.6940$ $y=0.3056$ $u'=0.5259$ $v'=0.5210$

CCT=1001K (Duv=-0.0783) Dominant WL:Ld =621.5nm Purity=99.9%

Peak WL:Lp=631.4nm FWHM=17.1nm

Render Index: Ra=26.9 Render Index: AvgR =30.4

R1 =7 R2 =78 R3 =32 R4 =0 R5 =2 R6 =89 R7 =7

R8 =0 R9 =0 R10=71 R11=0 R12=79 R13=30 R14=60 R15=0

Photometric & Radiometric Parameters

Flux=59.34 lm Eff.:12.68 lm/W Fe=294.0 mW

Electrical parameters

V=24.0 V I=0.1950 A P=4.68 W PF=1.000 F=0.00 Hz

Status: Integral T = 291 ms Ip = 52524 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGBW(2700K)-56-5050-1M-R

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-27 14:45:08

Humidity:63.0%

Remarks:

Standard:

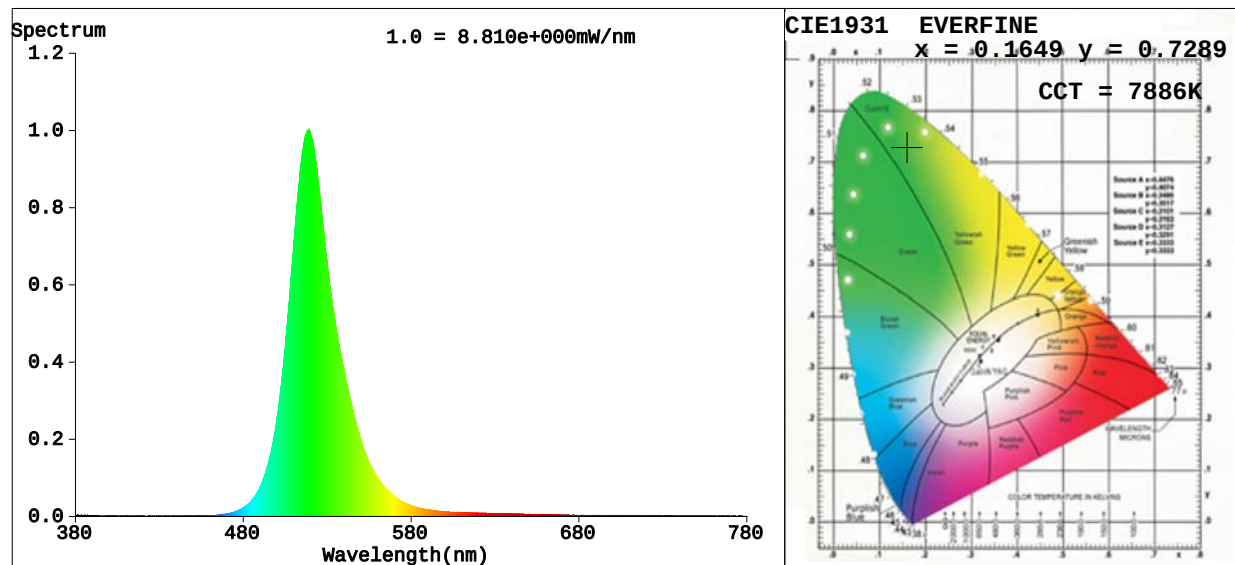

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1649$ $y=0.7289$ $u'=0.0578$ $v'=0.5746$

CCT=7886K (Duv=0.1593) Dominant WL:Ld =526.4nm Purity=81.1%

Peak WL:Lp=519.3nm FWHM=28.6nm

Render Index: Ra=0.0 Render Index: AvgR =2.4

R1 =0	R2 =0	R3 =0	R4 =0	R5 =0	R6 =0	R7 =0	
R8 =0	R9 =0	R10=0	R11=0	R12=0	R13=0	R14=36	R15=0

Photometric & Radiometric Parameters

Flux=149.3 lm Eff.:31.69 lm/W Fe=311.8 mW

Electrical parameters

V=24.0 V I=0.1963 A P=4.71 W PF=1.000 F=0.00 Hz

Status: Integral T = 466 ms Ip = 52562 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGBW(2700K)-56-5050-1M-G

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-27 14:45:43

Humidity:63.0%

Remarks:

Standard:

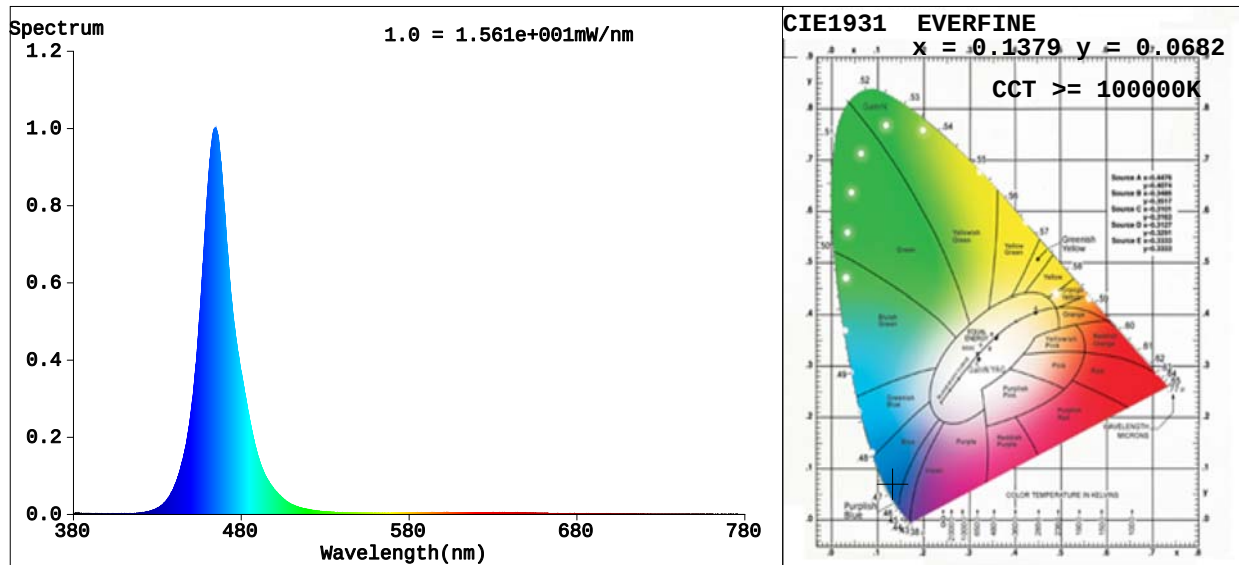

Colorimetric Parameters

Chromaticity Coordinate: $x=0.1379$ $y=0.0682$ $u'=0.1557$ $v'=0.1733$

CCT=100000K (Duv=0.1525) Dominant WL:Ld =468.9nm Purity=94.6%

Peak WL:Lp=464.5nm FWHM=20.5nm

Render Index: Ra=5.8 Render Index: AvgR =4.7

R1 =18	R2 =0	R3 =0	R4 =0	R5 =28	R6 =0	R7 =0	
R8 =0	R9 =0	R10=0	R11=0	R12=0	R13=0	R14=0	R15=25

Photometric & Radiometric Parameters

Flux=31.26 lm Eff.:6.65 lm/W Fe=416.6 mW

Electrical parameters

V=24.0 V I=0.1957 A P=4.7 W PF=1.000 F=0.00 Hz

Status: Integral T = 374 ms Ip = 52483 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGBW(2700K)-56-5050-1M-B

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-27 14:46:18

Humidity:63.0%

Remarks:

Standard:

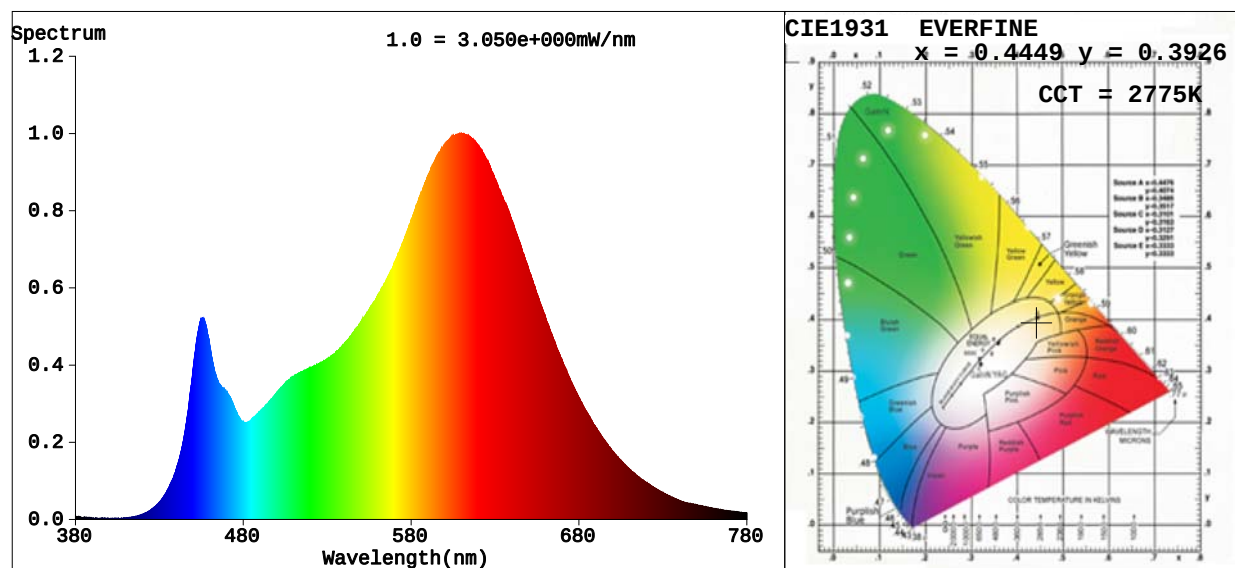

Colorimetric Parameters

Chromaticity Coordinate: $x=0.4449$ $y=0.3926$ $u'=0.2609$ $v'=0.5180$

CCT=2775K (Duv=-0.0055) Dominant WL:Ld =585.9nm Purity=51.4%

Peak WL:Lp=609.9nm FWHM=113.7nm

Render Index: Ra=86.1 Render Index: AvgR =83.6

R1 =89 R2 =99 R3 =89 R4 =85 R5 =91 R6 =93 R7 =80

R8 =64 R9 =28 R10=98 R11=87 R12=84 R13=92 R14=95 R15=82

Photometric & Radiometric Parameters

Flux=136.8 lm Eff.:29.21 lm/W Fe=445.9 mW

Electrical parameters

V=24.0 V I=0.1952 A P=4.68 W PF=1.000 F=0.00 Hz

Status: Integral T = 1236 ms Ip = 51471 (79%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGBW(2700K)-56-5050-1M-W

Test By:SHAN

Temperature:25.3Deg

Manufacturer:


Assessor:

Date:2018-08-27 14:46:57

Humidity:63.0%

Remarks:

Standard:

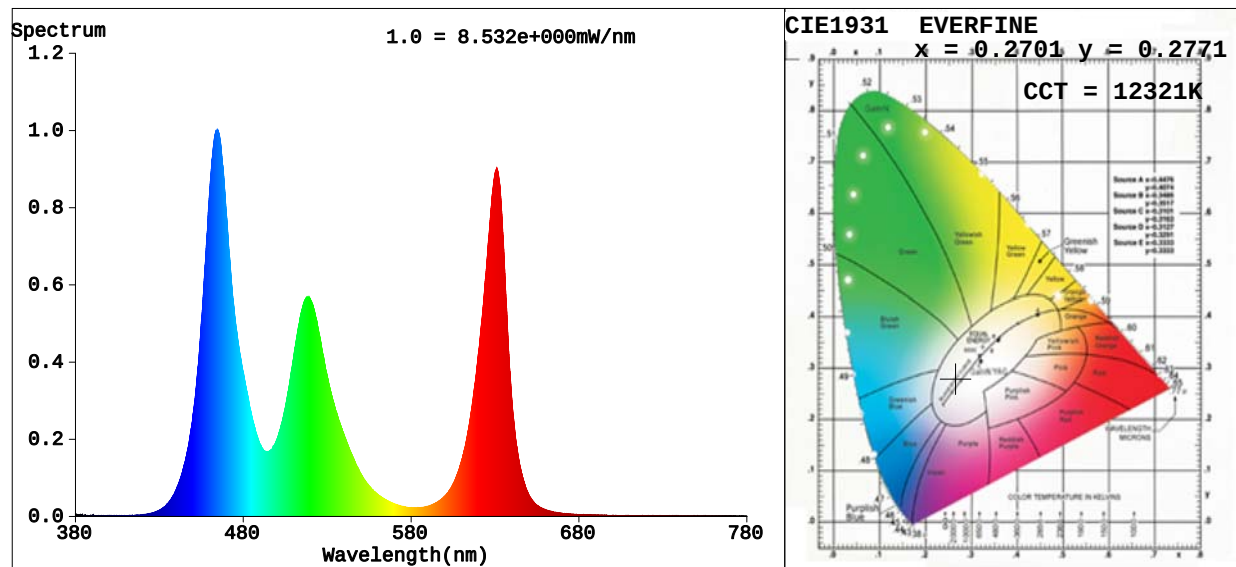

Colorimetric Parameters

Chromaticity Coordinate: $x=0.2701$ $y=0.2771$ $u'=0.1868$ $v'=0.4311$

CCT=12321K(Duv=0.0008) Dominant WL:Ld =479.0nm Purity=26.6%

Peak WL:Lp=464.8nm FWHM=20.5nm

Render Index:Ra=38.7 Render Index:AvgR =32.1

R1 =15	R2 =52	R3 =73	R4 =34	R5 =37	R6 =46	R7 =52	
R8 =0	R9 =0	R10=0	R11=19	R12=53	R13=21	R14=79	R15=0

Photometric & Radiometric Parameters

Flux=128.1 lm Eff.:20.32 lm/W Fe=548.5 mW

Electrical parameters

V=24.0 V I=0.2627 A P=6.3 W PF=1.000 F=0.00 Hz

Status: Integral T = 532 ms Ip = 52397 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:C-SFR-F15S-HB-D24CC-RGBW(2700K)-56-5050-1M-RGB	Date:2018-08-27 15:03:42
Test By:SHAN	Humidity:63.0%
Temperature:25.3Deg	Remarks:
Manufacturer:	Standard:
Assessor:	